

1N-02
007246

NASA Contractor Report 202335

User's Manual for DuctE3D: A Program for 3D Euler Unsteady Aerodynamic and Aeroelastic Analysis of Ducted Fans

R. Srivastava and T.S.R. Reddy
University of Toledo
Toledo, Ohio

April 1997

Prepared for
Lewis Research Center
Under Grant NAG3-1230



National Aeronautics and
Space Administration

User's Manual for DuctE3D: A Program for 3D Euler Unsteady Aerodynamic and Aeroelastic Analysis of Ducted Fans

Version 1.0

R. Srivastava*
T. S. R. Reddy*

Department of Mechanical Engineering
University of Toledo
Toledo, Ohio 43606

SUMMARY

The program DuctE3d is used for steady or unsteady aerodynamic and aeroelastic analysis of ducted fans. This guide describes the input data required and the output files generated, in using DuctE3D. The analysis solves three dimensional unsteady, compressible Euler equations to obtain the aerodynamic forces. A normal mode structural analysis is used to obtain the aeroelastic equations, which are solved using either the time domain or the frequency domain solution method. Sample input and output files are included in this guide for steady aerodynamic analysis and aeroelastic analysis of an isolated fan row.

*NASA Resident Research Associate at Lewis Research Center

TABLE OF CONTENTS

Summary	
1. Introduction	1
2. Analysis.....	1
3. Description of Input Data	1
3.1 Dimension Statements.....	3
3.2 Input Data File: ducte3d.inp	3
4. Description of Input & Output Files.....	14
5. Additional Notes.....	15
6. Test Cases	15
6.1 Steady aerodynamic analysis of an isolated fan row.....	16
6.2 Time domain aeroelastic analysis of an isolated fan row.....	25
6.3 Frequency domain aeroelastic analysis of an isolated fan row	34
7. Run Stream on Cray YMP.....	46
8. References.....	47

1. INTRODUCTION

This is a user's guide for the DuctE3D (Ducted Fan Euler Three Dimensional Analysis) computer code, which has been developed for steady or unsteady aerodynamic analysis and flutter analysis of fan configurations. This guide will help the user in the preparation of the input data file required by the DuctE3D code. Detailed explanations of the aerodynamic analysis, the numerical algorithms, and the aeroelastic analysis are not given in this guide. Instead, the reader is directed to specific references that deal with each of these items. The DuctE3D code was developed under the direction of the Structural Dynamics Branch at NASA Lewis Research Center. It is made available strictly as a research tool. Neither NASA Lewis Research Center, nor any individuals who have contributed to the development of the code, assume any liability resulting from the use of this code beyond research needs.

2. ANALYSIS

The aerodynamic analysis used in this code is based on the unsteady three-dimensional Euler equations. These equations are solved for a fan configuration. The coordinate system used is shown in Fig. 1. Detailed descriptions of the aerodynamic analysis can be found in Refs. 1 and 2. These references contain a full description of the formulation including the governing equations and the boundary conditions. The transformation of the equations to the computational plane and the subsequent discretization and solution of these equations is also described. A finite difference Alternating Direction Implicit (ADI) scheme is used to solve the Euler equations. A hybrid implicit-explicit scheme is used to reduce computational time. The aeroelastic analysis is described in Refs. 3 and 4. The aeroelastic equations are formulated in normal mode form and are solved for flutter in both time and frequency domains. For the time domain analysis, the aeroelastic equations are integrated in time using Newmark's method. The nature of the response indicates the stability. For the frequency domain aeroelastic analysis, the blades are moved in a prescribed pulse motion. The time history of the forces (generalized forces), due to the pulse motion, is Fourier analyzed to obtain unsteady aerodynamic coefficients. These unsteady aerodynamic coefficients must then be used in a separate eigen analysis to determine the stability of the fan. This eigen analysis is carried out as a post processor and is not described in this manual

3. DESCRIPTION OF INPUT DATA

The DuctE3D code is written in FORTRAN. It was developed and is operational on the Cray YMP computer at NASA Lewis Research Center under the UNICOS operating system. The source code is designated as *ducte3d.f*, and the input data for the code is provided in the input file *ducte3d.inp*.

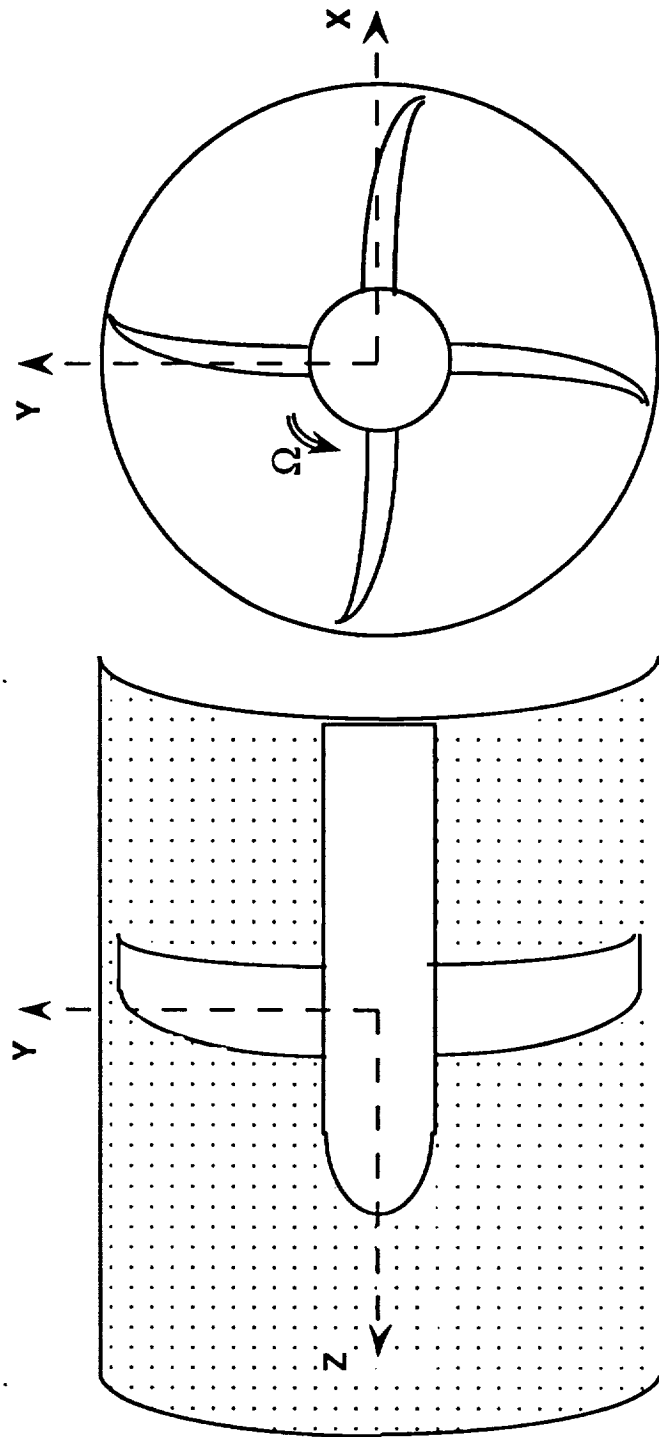


Figure 1. Axis system used by DuctE3D

3.1 Dimension Statements

The source code contains a parameter card that defines the largest possible size of the grid and number of blocks (passages) for calculation. For a larger grid size, the parameter statement should be changed globally in the source code. An example card is as follows:

```
parameter (imx=100, jmx=33, kmx=33, nblk=8, kmd=3, nblk3=nblk*3+1)
```

where

imx = maximum number of grid points in the axial (chordwise) direction

jmx = maximum number of grid points in the radial direction

kmx = maximum number of grid points + 1 in the circumferential direction

nblk = maximum number blade passages for computation

kmd = maximum number of structural modes in the analysis

3.2 Input Data File: ducte3d.inp

This file contains the standard (UNIT 5) input that the DuctE3D code requires. In the input file, the values of each set of input variables is preceded by an informational line containing the names of the variables. The name of the variables listed on the informational line are not used by the program. Following this line the values of the variables are listed. The real values are read in 8F10.4 format and integer values are read in 8I10 format. There are also a few logical variables that require either 'true' or 'false' as inputs.

The input variables are described below in the order in which they are required in the input data file (sample input file is shown on page 16). The informational card is listed first, followed by the description of the variables appearing on this informational card. Sample values are also given.

The first card is a title and can be up to 80 characters long.

example: SR3CX2 DUCTED PROPFAN AEROELASTIC ANALYSIS

ADV	GMU	ALFA	PSI	WW	DT	REYREF
-----	-----	------	-----	----	----	--------

variable:	ADV
type:	real variable
description:	advance ratio
example:	3.55

variable: GMU
 type: real variable
 description: not used
 example: 0.0

variable: ALFA
 type: real variable
 description: angle of attack of center body with respect to free stream
 example: 0.0

variable: PSI
 type: real variable
 description: not used
 example: 0.0

variable: WW
 type: real variable
 description: artificial dissipation factor
 example: 7.0

variable: DT
 type: real variable
 description: time step, suggested values $0.0001 < DT < 0.005$
 example: 0.003

variable: REYFRE
 type: real variable
 description: only Euler analysis permissible, must specify a negative number
 example: -1.0

IMAX JMAX KMAX JTIP ITEL ILE INOSE

variable: IMAX
 type: integer variable
 description: total number of grid points in axial direction ($\leq imx$)
 example: 100

variable: JMAX
 type: integer variable
 description: total number of grid points in radial direction, hub to tip and beyond ($\leq jmx$)
 example: 33

variable: KMAX
 type: integer variable
 description: total number of grid points in circumferential direction + 1 ($\leq kmx$)
 example: 22

variable: JTIP
 type: integer variable
 description: number of grids up to the tip of the blade along radial direction
 example: 20

variable: ITEL
type: integer variable
description: number of grid points between downstream boundary and trailing edge
example: 30

variable: ILE
type: integer variable
description: number of grid points between upstream boundary and leading edge
example: 36

variable: INOSE
type: integer variable
description: number of grid points between the nose of the hub and upstream boundary
example: 16

FSTP FMINF BETA34 DIA DX DZ VIBFRE

variable: FSTP
type: real variable
description: total number of time steps
example: 1800.0

variable: FMINF
type: real variable
description: free stream Mach number
example: 0.50

variable: BETA34
type: real variable
description: blade setting angle at 75% radius from plane of rotation in degrees (used only if grid is internally generated)
example: 61.2

variable: DIA
type: real variable
description: diameter of the propeller
example: 1.0

variable: DX
type: real variable
description: the distance of the first grid point off the blade in the axial direction, as a percentage of local chord (used only if grid is internally generated)
example: 0.01

variable: DZ
type: real variable
description: the distance of the first point off the blade in the direction normal to the blade, as a percentage of local chord. Used only if grid is internally generated.
example: 0.02

variable: VIBFRE
 type: real variable
 description: vibration frequency in Hz or pulse width in nondimensional time used in frequency domain flutter analysis
 example: 0.6

ICCW ITURB LTHIN IGR ISWF

variable: ICCW
 type: integer variable
 description: indicator for direction of rotation of the propeller, see Fig. 1
 example: 0 rotates clockwise (-ve Z rotation)
 1 rotates counter-clockwise (+ve Z rotation)

variable: IFAN
 type: integer variable
 description: must be set to 1 for ducted
 example: 1

variable: ITURB
 type: integer variable
 description: viscous runs (not used)
 example: 1

variable: LTHIN
 type: integer variable
 description: viscous control (not used)
 example: 0

variable: IGR
 type: integer variable
 description: control for reading in the computational grid, see subroutine WINGEO for detail
 example: 0 algebraic aerodynamic grid generated within the program
 1 externally generated aerodynamic grid is read in from UNIT 2, input file

variable: ISWF
 type: integer variable
 description: control for output of computational grid
 example: 0 no print out
 1 print grid (aerodynamic mesh) to UNIT 7 output file

P0 T0 A0 PRATIO

variable: P0
 type: real variable
 description: static pressure (psi)
 example: 14.7

variable: T0
 type: real variable
 description: total temperature of the freestream in Rankine
 example: 528.0

variable: A0
type: real variable
description: sonic velocity of the fluid (inch/sec)
example: 13040.0

variable: PRATIO
type: real variable
description: static pressure pressure ratio
example: 1.0

RESTART , QUASISTEADY , INFLOW , AEROELASTIC, COUNTER ROTATION, RESABD and DUCT

variable: RESTART
type: logical variable
description: restart option
example: FALSE: start new case
TRUE: restarts, will read grid and flowfield information from UNIT 11 input file

variable: QUASISTEADY
type: logical variable
description: quasisteady or unsteady
example: FALSE: unsteady case
TRUE: quasi-steady case

variable: INFLOW
type: logical variable
description: must be set to FALSE
example: FALSE

variable: AEROELASTIC
type: logical variable
description: aerodynamic or aeroelastic analysis
example: TRUE: aeroelastic analysis
FALSE: aerodynamic analysis

variable: COUNTER ROTATION
type: logical variable
description: single or counter rotation analysis
example: FALSE: single rotation analysis
TRUE: counter rotation analysis

variable: RESABD
type: logical variable
description: restart for deflection calculations
example: FALSE: restart values are used
TRUE: will read previous solution but generates grid

variable: DUCT
type: logical variable
description: ducted or unducted analysis
example: FALSE: unducted geometry
TRUE: ducted geometry

IFLTR NUMCYC NSTDY JMODE NBLOKS

variable: IFLTR
type: integer variable
description: flutter analysis control, ignored if aeroelastic is FALSE
example: < 0 time domain flutter analysis
 > 0 frequency domain flutter analysis

variable: NUMCYC
type: integer variable
description: number of cycles of harmonic oscillations, ignored for other cases
example: 3

variable: NSTDY
type: integer variable
description: type of oscillation used for frequency domain flutter analysis, ignored for other cases
example: 1 harmonic oscillations
 2 pulse oscillation, VIBFRE is treated as pulse width

variable: JMODE
type: integer variable
description: mode number in which the blade is to be oscillated for frequency domain flutter analysis, ignored for other cases
example: 2

variable: NBLOKS
type: integer variable
description: number of blade passages used in the analysis, number of blades should be an integer multiple of NBLOKS
example: 1

NOTE : The following data line is required only for counter-rotation analysis. It must be removed for any single-rotation analysis.

XLOC DIAA BETAA ITELA ILEA

variable: XLOC
type: real variable
description: axial distance of the pitch change axis of aft fan from the pitch change axis of front fan
example: 23.776

variable: DIAA
type: real variable
description: diameter of the aft fan
example: 140.0

variable: BETAA
 type: real variable
 description: setting angle of the aft fan
 example: 54.4

variable: ITELA
 type: integer variable
 description: number of grid points from trailing edge of aft fan to downstream boundary.
 example: 38

variable: ILEA
 type: integer variable
 description: number of grid points upstream of leading edge of aft fan
 example: 8

FNRS

variable: FNRS
 type: real variable
 description: number of axial data points to define center body or hub, converted to integer inside the program
 example: 63.010

NOTE: a total of FNRS values of XR and RR should follow

	XR	RR
variable:	XR	
type:	real variable	
description:	value of the axial station defining hub geometry	
example:	0.1	
	0.2	
	...	
	...	
	1.5	
variable:	RR	
type:	real variable	
description:	value of hub radius at axial station XR	
example:	0.05	
	0.08	
	...	
	...	
	0.225	

	XLED	ZLED	CHORD
variable:		XLED	
type:		real variable	
description:		axial distance of the leading edge of the duct from the pitch change axis	
example:		-5.0	
variable:		ZLED	
type:		real variable	
description:		radial distance of the leading edge of the duct from the axis of rotation	
example:		0.505	
variable:		CHORD	
type:		real variable	
description:		chord length of the duct, normalized with the diameter	
example:		2.0	

	FSYM	FNU	FNL
variable:	FSYM		
type:	real variable		
description:	symmetry parameter		
example:	0 non-symmetric airfoil cross-section		
	1 symmetric airfoil cross-section		
variable:	FNU		
type:	real variable		
description:	number of points on the upper surface of airfoil, converted to integer within the program		
example:	33.0		
variable:	FNL		
type:	real variable		
description:	number of points on the lower surface of airfoil, converted to integer within the program, must be same as FNU		
example:	33.0		

NOTE: a total of FNU values of x and y should follow

	X	Y
variable:	X	
type:	real variable	
description:	value of the axial station defining duct geometry	
example:	0.000	
	0.025	
	...	
	...	
	0.225	

variable: Y
 type: real variable
 description: value of duct radius at axial station XR
 example: 0.000000
 0.005765
 ...
 ...
 0.022514

INASTRAN

variable: INASTRAN
 type: integer variable
 description: static aeroelastic analysis, ignored if `aeroelastic` is false
 example: 1 static aeroelastic analysis
 0 no static aeroelastic analysis

FNC FROTAT FB FTPRP FTWST FCOB FGR

variable: FNC
 type: real variable
 description: number of stations at which blade is defined, converted to integer within the program
 example: 13.0

variable: FROTAT
 type: real variable
 description: for future use, must use a value of 1.01
 example: 1.01

variable: FB
 type: real variable
 description: number of blades of the propeller, converted to integer within the program
 example: 4.0

variable: FTPRP
 type: real variable
 description: for future use, must use a value of 1.01
 example: 1.01

variable: FTWST
 type: real variable
 description: for future use, must use a value of 1.01
 example: 1.01

variable: FCOB
 type: real variable
 description: number of root chord lengths the upstream and downstream boundaries are located at from the pitch change axis
 example: 8.0

variable: FGR
type: real variable
description: control for future use, must use a value of 1.01
example: 1.01

DATA TYPE

variable: DATA TYPE
type: real variable
description: determines the input format for airfoil cross-section
example: 1 format is 3f10.6 XUPPER, ZUPPER, ZLOWER
2 format is 6f10.6 XUPPER, ZUPPER, ZLOWER, XUPPER, ZUPPER, ZLOWER
3 format is 10x, 6f10.6 XUPPER, ZUPPER, ZLOWER, XUPPER, ZUPPER, ZLOWER
6 format is 10x, 4f10.6 XUPPER, ZUPPER, XLOWER, ZLOWER

NOTE: The input data set from YW(J) to ZLOWER should be repeated FNC times.

YW(J)	AL	ALED	FAD	CHD	FSEC	THICK
-------	----	------	-----	-----	------	-------

variable: YW(J)
type: real variable
description: span station or radius location
example: 0.191708

variable: AL
type: real variable
description: angle with respect to blade setting angle in degrees
example: 0.0

variable: ALED
type: real variable
description: leading edge alignment
example: 0.01

variable: FAD
type: real variable
description: face alignment
example: -0.01

variable: CHD
type: real variable
description: chord
example: 0.2

variable: FSEC
type: real variable
description: blade geometry parameter
example: 1 section airfoil cross-sections are identical along the blade span
2 section airfoil cross-sections are different along the blade span

variable: THICK
 type: real variable
 description: control for future use, must use a value of 1.01
 example: 1.01

ZSYM FNU FNL

variable: ZSYM
 type: real variable
 description: symmetry parameter
 example: 0 non-symmetric airfoil cross-section
 1 symmetric airfoil cross-section

variable: FNU
 type: real variable
 description: number of points on the upper surface of airfoil, converted to integer within the program
 example: 25.0

variable: FNL
 type: real variable
 description: number of points on the lower surface of airfoil, converted to integer within the program
 example: 25.0

NOTE: See input variable DATA TYPE. If ZSYM = 1, input contains only the upper surface definition. Must have FNU sets of data for upper surface and FNL for lower surface.

X ZUPPER ZLOWER

variable: XUPPER
 type: real variable
 description: chordwise distance from leading edge, normalized with local chord
 example: 0.0 .. 1.0

variable: ZUPPER
 type: real variable
 description: upper surface coordinates corresponding to XUPPER values, normalized with local chord
 example: 0.0 .. 0.02

variable: XLOWER
 type: real variable
 description: chordwise distance from leading edge, normalized with local chord
 example: 0.0 .. 1.0

variable:	ZLOWER
type:	real variable
description:	lower surface coordinates corresponding to XLOWER values, normalized with local chord
example:	0.0 .. -0.02

4. DESCRIPTION OF INPUT & OUTPUT FILES

The code uses the following files:

- (1) UNIT 2: input file; unformatted file containing externally generated grid. Not required if grid is generated internally.
- (2) UNIT 3: input file; formatted file containing blade structural grid. Required only for aeroelastic analysis. See subroutine STRUC0 for details.
- (3) UNIT 4: input file; formatted file containing blade generalized mass, natural frequencies and normal mode shapes. Required only for aeroelastic analysis. See subroutine STRUC0 for detail.
- (4) UNIT 5 : input file; formatted input file named as ducte3d.inp. Contains information on geometry, grid generation parameters, operating condition and solution control parameters. The file format and input variables have been defined in the previous section.
- (5) UNIT 6: output file; formatted file renamed as ducte3d.out. Contains information on grid generation, operating condition of the solution, convergence history and chordwise pressure coefficients.
- (6) UNITs 7 & 9: output files; unformatted grid files for plotting program PLOT3D created at the end of the calculations. UNIT 7 contains grid for front row and UNIT 9 for aft row.
- (7) UNITs 8 & 10: output files; unformatted aerodynamic solution files for PLOT3D created at the end of the calculations. UNIT 8 contains flow information for front row and UNIT 10 contains for aft row.
- (8) UNIT(s) 10+n, $1 \leq n \leq \text{NBLOKS}$: input file(s); unformatted file(s) for restart run. For restart, previous run output files UNIT 30+n are renamed as UNIT 10+n for present run.
- (9) UNIT(s) 30+n, $1 \leq n \leq \text{NBLOKS}$: output file(s); unformatted file(s) written at the end of each run. Used for restarting a run.
- (10) UNIT 57: output file; formatted file containing variation of normal modes for all blades and all modes used in the analysis. In time domain aeroelastic analysis it contains the time history

of the blade response; in frequency domain it is used as motion input file in Fourier analysis. It has six columns which are iteration count, blade number, time, and blade displacements in the three normal modes. This file is not generated for aerodynamic analysis.

- (11) UNITs 93, 94 & 95: output files; formatted file containing generalized force variation with time for all the blades. Each unit contains forces for one mode of analysis. These forces in conjunction with the motion in file UNIT 57 are used in frequency domain flutter analysis. These files have five columns which are, iteration count, blade number, total generalized force, steady generalized force and unsteady generalized force. Unsteady generalized force (fifth column) is used to determine the aeroelastic stability. This file is not generated for aerodynamic analysis.
- (12) UNIT 98: output file; formatted file containing the time history information of force coefficients. It has four columns which are iteration count, power coefficient, thrust coefficient and efficiency.

5. ADDITIONAL NOTES

The aerodynamic and aeroelastic analysis assumes the following normalizations: all lengths are normalized by the diameter of the rotor, speeds with the free stream speed of sound and density with free stream density. The input geometry may be prescribed either in non-dimensional quantities normalized by the diameter or in dimensional quantities. If geometry is defined in non-dimensional quantities, the diameter should be defined as 1. For counter rotation geometry, the front rotor diameter is used for normalization. Additional inputs are required for geometry definitions in the case of a counter rotating geometry. The code can also be used to analyze unducted rotors with minor input changes. Detailed description of the inputs and sample run cases for unducted fans are listed in Ref. 5.

6. TEST CASES

Some sample test cases are provided in this section. A brief description of the test case along with input and output file listing is provided. In order to save space several lines from the listings have been deleted. The listings are provided to ensure that the result obtained by the user compares favorably with the listings provided here.

The output listing of UNIT 6 is organized as follows:

The beginning of the output file contains the information regarding the type of solution being obtained, e.g. steady aerodynamic solution, aeroelastic solution, single-rotation fan, counter-rotation fan, etc., followed by the flight conditions.

Geometry input data is then echoed for fresh runs, it is suppressed for restart runs. The maximum and minimum Jacobians follow the geometry input echo. This provides information about the grid. If the maximum and minimum Jacobians have opposite signs, a grid line crossover is indicated and a new grid will have to be generated. This calculation is made only in the first time step.

The residuals are listed next. Maximum absolute change in the density along with the location of this change is printed. At this location, changes in momentum and energy are also listed. These quantities are printed for the first ten iterations and then every 25th iteration beginning from the 26th iteration. Also, every 50th iteration, the average value of the residuals are printed. The solution is stopped any time any one of the maximum residuals become larger than one. The listing of the residuals continue until the maximum number of time steps provided in the input has been reached.

The pressure coefficient for each spanwise station of each blade is printed at the last time step. For the counter-rotation cases, front row pressure coefficients are followed by the listing for aft row. Along with the listing, a line plot of the pressure coefficient variation with the grid streamwise index is also provided for a quick reference.

The power coefficient, thrust coefficient and efficiency are listed next followed by the information about the CPU time and memory used per time step.

The following test cases are provided in this manual:

- 6.1 Steady aerodynamic analysis of an isolated fan row.
- 6.2 Time domain aeroelastic analysis of an isolated fan row with eight blades.
- 6.3 Frequency domain aeroelastic analysis of an isolated fan row with eight blades.

6.1 Steady aerodynamic analysis of an isolated fan row

Description:

In this case an isolated fan row with eight blades is analyzed. The fan geometry is obtained by encasing the standard eight bladed SR3 propfan in a rigid cylindrical duct. For the present analysis the tip gap has been set to 0.4% of the propfan radius. There are no grid points in the radial direction, hence the flow through the gap will not be analyzed, but because of the gap there will be some pressure relief at the tip. The inflow is axial and uniform, with a free stream Mach number of 0.50. The advance ratio is 3.55 and setting angle at blade 75% radius is 61.2°. The convergence is judged by the convergence of time history of the power coefficient. A total of 9000 steps were required to obtain convergence for the present case. The input parameters are provided in the listing of the input. For a steady solution, the input parameter `QUASISTEADY` should be set to `TRUE`. Once the `AEROELASTIC` variable is set to `FALSE` all other input related to aeroelastic

calculation is ignored. For a restart solution, the UNIT 31 file generated in the previous analysis should be linked to UNIT 11 file of the current analysis and the input variable RESTART should be set to TRUE.

UNIT 5 (ducte3d.inp; input file)

SR3-Ducted Propfan, flat plate duct

ADV	GMU	ALFA	PSI	WW	DT	REYREF
3.5500	0.0	0.0	0.0	7.0	.0030	-1.0
IMAX	JMAX	KMAX	JTIP	ITEL	ILE	INOSE
100	21	16	20	30	36	16
FSTP	FMINF	BETA34	DIA	DX	DZ	VIBFRE
9000.0	0.500	61.20	1.0	0.01	0.030	1.8
ICCW	IFAN	ITURB	LTHIN	IGR	ISWF	
1	1	0	0	0	0	
PO	TO	A0	PRATIO			
14.700	528.00	13040.00	1.000			

RESTART, QUASISTEADY, INFLOW, AEROELASTIC, COUNTER ROTATION, RESABD AND DUCT
 FALSE TRUEFALSEFALSEFALSE TRUE
 IFLTR NUMCYC NSTDY JMODE NBLOKS
 -1 0 2 3 1
 FNRS
 60.01
 XR RR
 -0.295920 0.010000
 -0.287760 0.014857
 -0.279590 0.022857
 -0.271430 0.029796

*** Several lines of hub geometry definition deleted ***

0.661220	0.154650		
0.700000	0.154650		
0.800000	0.154650		
1.099999	0.154650		
XLED	ZLED	CHORD	----- PARAMETERS FOR THE COWL
-0.25	0.505	0.5	

FSYM, FNU, FNL
 1.0 33.0 33.0
 X Y
 0.00000 0.00000
 .02500 .05765
 .06250 .09470
 .12500 .13075
 .25000 .17775

*** Several lines of duct geometry definition deleted ***

4.00000	.13115
4.25000	.10275
4.50000	.07240
4.75000	.04035
5.00000	.00630

INASTRAN
 0

FNC	FROTAT	FB	FTPRP	FTWST	FCOB	FGR
13.0	1.01	8.0	1.01	1.01	8.	1.01
DATA TYPE						
2.05						
YW(J)	AL	ALED	FAD	CHD	FSEC	THICK
0.00000	33.01000	-0.02075	0.00000	0.16695	1.000000	1.00
ZSYM	FNU	FNL				
0.000000	25.000000	25.000000				
X	ZUPPER	ZLOWER				
0.000000	0.000000	0.000000	0.043924	0.027370	-0.027239	
0.085493	0.038369	-0.039117	0.126746	0.048135	-0.050491	
0.167928	0.056366	-0.060960	0.209243	0.063894	-0.071346	
0.250325	0.070800	-0.081508	0.291401	0.077129	-0.091354	
0.332469	0.082918	-0.100846	0.373520	0.088131	-0.109802	
0.414583	0.092607	-0.117979	0.455679	0.096111	-0.124962	
0.496797	0.098159	-0.130168	0.537985	0.098408	-0.133133	
0.579236	0.096783	-0.133664	0.620573	0.093367	-0.131732	
0.662011	0.088250	-0.127295	0.703559	0.081441	-0.120175	
0.745148	0.073052	-0.110456	0.786971	0.063141	-0.098069	
0.829177	0.052067	-0.083190	0.871426	0.040052	-0.065918	
0.913613	0.027690	-0.046729	0.956337	0.014398	-0.024961	
1.000000	0.000000	0.000000				
YW(J)	AL	ALED	FAD	CHD	FSEC	THICK

.....

*** Several sets of blade geometry definition deleted ***

.....

YW(J)	AL	ALED	FAD	CHD	FSEC	THICK
0.50004	-7.85471	0.10204	0.00164	0.07007	1.000000	1.00
ZSYM	FNU	FNL				
0.000000	25.000000	25.000000				
X	ZUPPER	ZLOWER				
0.000000	0.000000	0.000000	0.045021	0.006198	-0.001988	
0.088813	0.009473	-0.001168	0.131787	0.012711	-0.000386	
0.175385	0.015168	0.000824	0.217988	0.017158	0.001177	
0.260786	0.019148	0.001959	0.303389	0.020749	0.002702	
0.345622	0.021492	0.002627	0.387620	0.022625	0.003370	
0.429638	0.023369	0.003685	0.471071	0.023255	0.003572	
0.513108	0.023570	0.003496	0.554346	0.023457	0.002955	
0.595993	0.022953	0.002841	0.636626	0.021983	0.002689	
0.677473	0.021012	0.002147	0.718321	0.019652	0.001996	
0.758973	0.017863	0.001844	0.799664	0.015256	0.000874	
0.839498	0.013429	0.000684	0.879974	0.010393	0.000532	
0.920041	0.007747	-0.000048	0.959719	0.003854	-0.000238	
1.000000	0.000000	0.000000				

UNIT 6 (duct3d.out; output file)

```

1      SR3-Ducted Propfan, flat plate duct
*****
*
*      STEADY EULER ANALYSIS
*      DUCTED PROPELLER
*
*****
+++++
+  atmospheric conditions
-----
+  pressure=14.699999999999999
+  speed of sound (in/sec)=13040.

```

+ density=1.210292069705291E-7

+++++

* operating conditions:

* rotor speed(rpm)=0.

* rotor speed(rad/sec)=0.

* Mach no.= 0.5

* advance ratio (J).= 3.549999999999997

* tip radius (inches)=0.5

NOT A RESTART, NO INITIAL SOLUTION.

FRONT BLADE ROW ROTATING IN COUNTER CLOCKWISE DIRN.

CONTRAVARIANT VELOCITIES EXTRAPOLATED ON SOLID SURFACES

RADIAL MOMENTUM EQUILLIBRIUM APPLIED ON DOWNSTREAM BOUNDARY

CHARACTERISTICS USED TO UPDATE UPSTREAM BOUNDARY

IN DISSIPATION SUBROUTINE THE COEFFICIENTS ARE :

IJDIS = 2

IKDIS = 1

IJ2 = 0

IIDIS = 1

IHPQ = 1

WWY COEFFICIENT IN DIS2 IS -1.

ICHAR IN JBC =1

IN WALLBC THE CONSTANTS ARE :

IWHIT = 0

INL = 1

IEX = 2

JEX = 1

INRES =0

IHORD =0

KHORD =0

ISMTH =0

KSMTH =0

IVIBR =0

WWF =100.

IMAX= 100

JMAX= 21

KMAX= 16

JTIP= 20

ITEL= 71

ILE = 36

INOSE= 16

NSTEP= 9000

DX = 0.01000000

DZ = 0.03000000

DT= 0.00300000

WW= 7.00000000

ALFA= 0.00000000

AMTIP= 0.44247784

FMINF= 0.50000000

ADVANCE RATIO = 3.55000000

vibration freq. = 0.00000000

VIBRATING IN 3 MODE

GMU= 0.00000000

PSI= 0.00000000

**** NSTDY =0

**** JMODE =3

```

cosa=1. sina=0.
Y( 1) = 0.0000
Y( 2) = 0.0300
Y( 3) = 0.0700
.....
*** Several lines deleted ***
.....
Y( 19) = 0.9920
Y( 20) = 1.0000
Y( 21) = 1.0100
No. OF RADIAL STATIONS ON BODY = 62
INPUT AIRFOIL GEOMETRY

      X      Y

CHORD =5. XP(N)=5. XP(NL) =0.
WSURFR CRDCWL=0.5
xled=-0.25 zled=0.5019999999999999
1  1.0000  0.0000
2  0.9500  0.0000
3  0.9000  0.0000
.....
*** Several lines deleted ***
.....
63  0.9000  0.0000
64  0.9500  0.0000
65  1.0000  0.0000
1  0.2500  0.5020
2  0.2250  0.5020
3  0.2000  0.5020
.....
*** Several lines deleted ***
.....
31 -0.2438  0.5020
32 -0.2475  0.5020
33 -0.2500  0.5020
ILE=65 NSURF=36
XLOC =0. INAS =0
NBLADS=8
IGR=1
ITPR=1
ITWS=1
THT=44.99999991709956
IROT=1
DATA TYPE=2
DIAL = 1.
BETA=61.20000000000005deg
PMB2=-0.502654822032234 IN DEGRESS = -28.79999988725524
INPUT WING GEOMETRY

PROFILE AT Y = 0.00000
      XLE      ZLE      CHORD      THICKNESS FACTOR      ALPHA
      -0.0174      0.0113      0.1669      1.0000      0.5761
INPUT WING GEOMETRY

```


.....

*** Several output lines of input data echo deleted ***

.....

```
PROFILE AT Y = 0.50004
      XLE      ZLE      CHORD      THICKNESS FACTOR      ALPHA
      0.1009      0.0156      0.0701      1.0000      -0.1371
DELTA BETA AT 75% SPAN IS -2.347735298443332E-2
irow=1 irc=1
SPAN=0.5000399999999985 YWN =0.5000399999999985
PB -6.274619684608354 J=1
PB -6.274619684608354 J=1
PB -6.383875993673456 J=2
PB -6.383875993673456 J=2
```

.....

*** Several lines deleted ***

.....

```
PB -35.51974285755659 J=19
PB -35.51974285755659 J=19
PB -35.56532434234305 J=20
PB -35.56532434234305 J=20
xladd=-0.25 rledd=0.5019999999999989 xted=0.2499999999999982 rted=0.5019999999999989 nd=35
xrd rld 10., 0.5019999999999989, 0.2499999999999982, 0.5019999999999989, 0.2249999999999996,
0.5019999999999989,
0.1999999999999993, 0.5019999999999989, 0.1749999999999989, 0.5019999999999989,
0.1499999999999986, 0.5019999999999989,
-0.2375000000000007, 0.5019999999999989, -0.2437500000000004, 0.5019999999999989, -
0.2475000000000005, 0.5019999999999989,
-0.25, 0.5019999999999989, -10., 0.5019999999999989
xg=9.891054401272692E-2 yg=0.4962293376645182 zg=7.589759179996535E-2 rry=0.5019999999999989
rtip=0.4999992006432432, 21
ygl=0.4962293376645182 ygt=0.4943035280608861 ygtu=0.4941059677291761 zgtu=7.654071180186328E-2
xr=1.965719937435793 rr=0.1546500000000002
xr=1.099998999999997 rr=0.1546500000000002
```

.....

*** Several lines deleted ***

.....

```
xr=-0.2959200000000006 rr=1.E-2
xr=-1.965719937435793 rr=1.E-2
rlet=0.4999377372134752 rled=0.5019999999999989 i=1
rlet=0.4999377372134752 rled=0.5019999999999989 i=2
```

.....

*** Several lines deleted ***

.....

```
rlet=0.4992299179370807 rled=0.5019999999999989 i=99
rlet=0.4992299179370825 rled=0.5019999999999989 i=100
rlet=0.5 rled=0.5019999999999989 rtet=0.5 rted=0.5019999999999989 rledf=1.99999999998891E-3
rtedf=1.99999999998891E-3
J=1 CHORD=0.1638099947863161
J=2 CHORD=0.1660150864596632
```

.....

*** Several lines deleted ***

```

*****
J=20 CHORD=7.387989523808835E-2
J=21 CHORD=7.387724509185789E-2
wingeo done ytipd=0.5
TOTAL NUMBER OF STEPS 9000
reyref=-1000000. reynum=0.
entering INITQ
FMINF=0.5 SMINF=0. ICBU=16 ICB0=100
imax=100 jmax=21 kmax=15 ngp=27720
MAX JACOB=7.999591762997441E-5 MIN JACOB=8.441722412160079E-9 AT 20
IJMAX=2 KJMAX=8 IJMIN=36 KJMIN=2
MAX JACOB=1.151533809000812E-4 MIN JACOB=1.291499186892988E-8 AT 19
IJMAX=2 KJMAX=8 IJMIN=36 KJMIN=2

```

*** Several lines of Jacobian output deleted ***

```

MAX JACOB=7.990930163025242E-5 MIN JACOB=1.406906985244854E-7 AT 3
IJMAX=99 KJMAX=8 IJMIN=71 KJMIN=14
MAX JACOB=5.501060715913598E-5 MIN JACOB=1.043742011267831E-7 AT 2
IJMAX=99 KJMAX=8 IJMIN=71 KJMIN=14

```

DRMAX	DUMAX	DVMAX	DWMAX	DEMAX	IB	IROW	IR	JR	KR
0.1006E-16	0.3290E-16	0.2327E-16	0.6339E-17	0.2941E-15	1	1	11	2	11
0.1919E-01	0.3520E-02	0.3838E-02	0.4655E-02	0.4827E-01	1	1	74	2	9
0.1844E-01	0.4586E-02	0.5098E-02	0.6060E-02	0.4596E-01	1	1	74	2	9
0.1702E-01	0.5733E-02	0.6969E-02	0.6905E-02	0.4299E-01	1	1	74	2	9
0.1674E-01	0.7202E-02	0.7913E-02	0.7725E-02	0.4300E-01	1	1	48	2	14
0.1601E-01	0.8115E-02	0.9166E-02	0.8097E-02	0.4088E-01	1	1	49	2	14
0.1552E-01	0.9360E-02	0.9623E-02	0.8554E-02	0.4029E-01	1	1	49	2	14
0.1468E-01	0.9878E-02	0.1036E-01	0.8672E-02	0.3791E-01	1	1	49	2	14
0.1394E-01	0.1085E-01	0.1041E-01	0.8925E-02	0.3673E-01	1	1	49	2	14
0.1303E-01	0.1100E-01	0.1072E-01	0.8902E-02	0.3416E-01	1	1	49	2	14
0.8443E-02	0.9337E-02	0.5973E-02	0.6438E-02	0.2297E-01	1	1	70	3	2
AVERAGE RESIDUES --					0.70619E-03	0.55029E-03	0.47197E-03	0.17194E-02	50
0.8646E-02	0.6238E-02	0.5518E-02	0.2748E-02	0.2307E-01	1	1	65	5	2
0.5634E-02	0.5314E-02	0.7428E-02	0.3295E-02	0.1537E-01	1	1	84	20	12
AVERAGE RESIDUES --					0.60366E-03	0.43154E-03	0.38030E-03	0.24536E-03	100

*** Several output lines deleted ***

```

AVERAGE RESIDUES -- 0.91947E-05 0.91663E-04 0.60043E-04 0.57420E-06 0.23476E-04 8950
0.9133E-04 0.5086E-03 0.5118E-03 0.1087E-04 0.2352E-03 1 1 87 19 5
0.9133E-04 0.4869E-03 0.5071E-03 0.9671E-05 0.2351E-03 1 1 87 19 5
0.9134E-04 0.4799E-03 0.5098E-03 0.9703E-05 0.2351E-03 1 1 87 19 5
AVERAGE RESIDUES -- 0.92855E-05 0.93271E-04 0.59862E-04 0.56628E-06 0.23554E-04 9000
ISTP= 9000 IB = 1 IROW = 1 TIME = 27.0000

```

J= 1 Y= 0.2431 CL= 0.0057 CD= 0.1476 CM= 0.0143

OPILOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

O	X	X/CL	X/CU	CPL	CPU
-0.0725	0.0000	0.0000	0.3222	0.3222	
-0.0709	0.0093	0.0107	0.8657	-0.0683	*
-0.0692	0.0198	0.0227	0.6316	-0.3675	*
-0.0672	0.0317	0.0363	0.6064	-0.2942	*
-0.0649	0.0450	0.0516	0.3564	-0.6833	*
-0.0624	0.0606	0.0682	0.3679	-0.4755	*
-0.0595	0.0781	0.0868	0.2955	-0.4562	*

I
I +
I +
I +
I +
I +
I +

Stars (x)	Plus Signs (y)
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10

J= 2 Y= 0.2642 CL= -0.0002 CD= 0.1479 CM= 0.0102

OPLOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

0	X	X/CL	X/CU	CPL	CPU			
-0.0784	0.0000	0.0000	0.3196	0.3196		*		I
-0.0768	0.0093	0.0107	0.8588	-0.0677	*			I +
-0.0750	0.0198	0.0227	0.6265	-0.3645		*		I +

.....

*** Several lines deleted ***

.....

0.0781	0.9784	0.9793	0.1557	0.1730	*	I
0.0799	0.9898	0.9903	0.1877	0.2209	++	I
0.0814	1.0000	1.0000	0.2287	0.2648	++	I

.....

*** Several sets of pressure coefficient output deleted ***

.....

J= 20 Y= 1.0000 CL= 0.2824 CD= 0.3689 CM= 0.0057

OPLOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

0	X	X/CL	X/CU	CPL	CPU		
	0.0765	0.0000	0.0000	-0.3187	-0.3187	I	*
	0.0771	0.0088	0.0103	0.3593	-0.9400	*	I +

.....

*** Several lines deleted ***

```

*****
0.1350 0.9769 0.9785 0.1083 0.0172          * +
0.1357 0.9892 0.9899 0.1113 0.0277          * +
0.1363 1.0000 1.0000 0.1175 0.0349          * +I
FOR THE SINGLE ROTATION PROFFAN :
ADVANCE RATIO =          3.55000000
POWER COEFFICIENT =      1.90484470
THRUST COEFFICIENT =     0.12226586
EFFICIENCY =            0.22786308
inlet mach no.= 0.477 u= -0.0001 v= 0.0000 w= -0.4770 ql= 1.0159 p= 0.7302 r= 0.01000 j= 1
exit mach no.= 0.471 u= -0.0315 v= 0.0354 w= -0.4688 ql= 1.0350 p= 0.7143 r= 0.15465 j= 1
inlet mach no.= 0.484 u= -0.0015 v= -0.0018 w= -0.4842 ql= 1.0159 p= 0.7302 r= 0.02469 j= 2
exit mach no.= 0.487 u= -0.0271 v= 0.0403 w= -0.4843 ql= 1.0350 p= 0.7143 r= 0.16501 j= 2
*****

*** Several lines deleted ***

*****
inlet mach no.= 0.478 u= 0.0042 v= 0.0038 w= -0.4781 ql= 1.0231 p= 0.7371 r= 0.49923 j= 20
exit mach no.= 0.583 u= -0.0343 v= 0.0847 w= -0.5763 ql= 0.9526 p= 0.7143 r= 0.49994 j= 20
inlet mach no.= 0.466 u= -0.0072 v= -0.0101 w= -0.4661 ql= 1.0231 p= 0.7371 r= 0.50200 j= 21
exit mach no.= 0.589 u= -0.0578 v= 0.0600 w= -0.5830 ql= 0.9526 p= 0.7143 r= 0.50200 j= 21
Relative Mach No. at Tip =0.8804315670821552
Relative Mach No. at Tip (Mid Plane)=0.6552434844609003
rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999
The Following Quantities are at I =5 Z=1.102164637904551
Mass Flow Rate =-0.236207591324586 (lb/s) Corrected =-0.2383157187171419 (lb/s @ 518.7R & 14.7psi)
The Following Quantities are at I =50 Z=2.053126919559777E-2
Mass Flow Rate =-0.2181974900088424 (lb/s) Corrected =-0.2201448791807783 (lb/s @ 518.7R & 14.7psi)
The Following Quantities are at I =95 Z=-0.8030763509607972
Mass Flow Rate =-0.2353509986381255 (lb/s) Corrected =-0.237451481032922 (lb/s @ 518.7R & 14.7psi)
TIME/ITERATION =0.6035743442960921

```

UNIT 98 (Output file; contains performance characteristics)

itn	cpwr	cth	eff
2,	0.3757886854022896,	-0.2409143621258414,	-2.275869441442012
3,	0.7486666951962384,	-0.1736646325623257,	-0.8234765210634336
4,	1.113009184348662,	-0.1078720917114397,	-0.3440635809305661
5,	1.467452655071085,	-4.378041892827155E-2,	-0.1059117557614391

```

*****

*** 8990 lines of output deleted ***

*****

```

8996,	1.90484801441329,	0.1222669469884616,	0.227864721240099
8997,	1.904934806776126,	0.1222928662365859,	0.2279026419148735
8998,	1.904846353133664,	0.1222664061727965,	0.2278639120679626
8999,	1.904933130402085,	0.1222923155162321,	0.2279018161603332
9000,	1.904844699655435,	0.1222658555353049,	0.2278630836565565

6.2 Time Domain Aeroelastic Analysis of an Isolated Fan Row

Description:

A test case for an aeroelastic stability analysis using time domain method is provided here. The fan analyzed has eight blades and the first three normal modes are included in the analysis. A steady solution is first generated using the sample case provided in 6.1 for the desired flow conditions. The aeroelastic analysis is then carried out by restarting the analysis from the steady solution. In order to carry out the aeroelastic analysis, the structural grid (UNIT 3) and structural mode shapes (UNIT 4), are needed. The input file for this analysis is very similar to the steady analysis with changes in the lines shown below in the input file **ducte3d.inp**. The input variables **RESTART** and **AEROELASTIC** are set to **TRUE**, **IFLTR** to a negative integer and **NBLOKS** to 8. The variables that need to be changed are indicated in **bold print**. All other input parameters remain the same as used in the steady aerodynamic analysis. The example given here was restarted from the steady solution presented in section 6.1 and was obtained by running the code for 9000 time steps with $dt=0.003$.

For starting the aeroelastic solution, the file generated on UNIT 31 in the steady analysis is linked to UNIT 11 for the current analysis. For an aeroelastic restart, i.e. restarting the solution from a previous aeroelastic solution, the only change required is to link the files generated on UNITS $30+n$ by the previous aeroelastic analysis to UNITS $10+n$ for the current analysis. Since, the time domain analysis method is used, any number of normal modes can be included in the analysis.

In addition to UNIT 98, additional output files are generated in this analysis. The file linked to UNIT 57 contains the time history of the normal mode displacements for all the modes and all the blades included in the analysis. The variation of normal modes provides the aeroelastic stability of the propeller. An increasing oscillation amplitude indicates instability. The interblade phase angle can be assessed from the time history of the normal modes. The other files generated do not contain any useful information and can be ignored.

UNIT 5 (ducte3d.inp; input file)

SR3D Only one direction marching (from root to tip)

.....

*** same as steady aerodynamic input, see section 6.1 ***

.....

RESTART , **QUASISTEADY** , **INFLOW** , **AEROELASTIC**, **COUNTER ROTATION**, **RESABD**, **DUCT**

TRUE TRUEFALSE TRUEFALSEFALSE TRUE

IFLTR **NUMCYC** **NSTDY** **JMODE** **NBLOKS**

-1 **0** **2** **1** **8**

FNRS

.....

*** same as steady aerodynamic input, see section 6.1 ***

.....

UNIT 6 (duct3d.out; output file)

```
1      SR3-Ducted Propfan, flat plate duct
*****
*      aeroelastic stability analysis      *
*      using normal mode structural model  *
*      with Euler aerodynamic model in    *
*      TIME DOMAIN                        *
*****
```

```
-----
Interblade Phase Angle =45. Degrees
-----
```

```
+++++
```

```
+ atmospheric conditions
```

```
-----
+ pressure=14.699999999999999
+ speed of sound (in/sec)=13040.
+ density=1.210292069705291E-7
```

```
+++++
```

```
* operating conditions:
```

```
-----
* rotor speed(rpm)=0.
* rotor speed(rad/sec)=0.
* Mach no.= 0.5
* advance ratio (J).= 3.549999999999997
* tip radius (inches)=0.5
-----
```

```
RESTART RUN FROM A PREVIOUS SOLUTION
FRONT BLADE ROW ROTATING IN COUNTER CLOCKWISE DIRN.
CONTRAVARIANT VELOCITIES EXTRAPOLATED ON SOLID SURFACES
RADIAL MOMENTUM EQUILLIBRIUM APPLIED ON DOWNSTREAM BOUNDARY
CHARACTERISTICS USED TO UPDATE UPSTREAM BOUNDARY
```

```
IN DISSIPATION SUBROUTINE THE COEFFICIENTS ARE :
```

```
IJDIS = 2
IKDIS = 1
IJ2 = 0
IIDIS = 1
IHPQ = 1
WWY COEFFICIENT IN DIS2 IS -1.
ICAR IN JBC -1
```

```
IN WALLBC THE CONSTANTS ARE :
```

```
IWHIT = 0
INL = 1
IEX = 2
JEX = 1
INRES =0
IHORD =0
KHORD =0
ISMTH =0
KSMTH =0
IVIBR =1
WWF =100.
```

```
IMAX=      100
JMAX=      21
KMAX=      16
JTIP=      20
ITEL=      71
ILE =      36
INOSE=     16
NSTEP=    8000
```

```

DX = 0.01000000
DZ = 0.03000000
DT= 0.00300000
WW= 7.00000000
ALFA= 0.00000000
AMTIP= 0.44247784
FMINF= 0.50000000
ADVANCE RATIO = 3.55000000
vibration freq. = 1.80000000
VIBRATING IN 3 MODE

```

```

GMU= 0.00000000

```

```

**** NSTDY =2

```

```

**** JMODE =3

```

```

cosa=1. sina=0.

```

```

TOTAL NUMBER OF STEPS 8000

```

```

reyref=-1000000. reynum=0.

```

```

FMINF=0.5 SMINF=0. ICBU=1 ICB=100

```

```

imax=100 jmax=21 kmax=15 ngp=27720

```

```

MAX JACOB=7.999591762776047E-5 MIN JACOB=8.441722412234353E-9 AT 20

```

```

IJMAX=2 KJMAX=8 IJMIN=36 KJMIN=2

```

```

MAX JACOB=1.151533808997819E-4 MIN JACOB=1.291499186729728E-8 AT 19

```

```

IJMAX=2 KJMAX=8 IJMIN=36 KJMIN=2

```

```

.....

```

```

*** Several lines of Jacobian output deleted ***

```

```

.....

```

```

MAX JACOB=7.990930162917559E-5 MIN JACOB=1.406906985237722E-7 AT 3

```

```

IJMAX=99 KJMAX=8 IJMIN=71 KJMIN=14

```

```

MAX JACOB=5.501060715851278E-5 MIN JACOB=1.043742011269572E-7 AT 2

```

```

IJMAX=99 KJMAX=8 IJMIN=71 KJMIN=14

```

DRMAX	DUMAX	DVMAX	DWMAX	DEMAX	IB	IROW	IR	JR	KR
0.9133E-04	0.4960E-03	0.5190E-03	0.1082E-04	0.2352E-03		1	1	87	19
FMINF=0.5 SMINF=0. ICBU=1 ICB=100									
imax=100 jmax=21 kmax=15 ngp=27720									
0.9133E-04	0.4793E-03	0.4699E-03	0.1087E-04	0.2352E-03		2	1	87	19
FMINF=0.5 SMINF=0. ICBU=1 ICB=100									
imax=100 jmax=21 kmax=15 ngp=27720									
0.9133E-04	0.5190E-03	0.4960E-03	0.1089E-04	0.2352E-03		3	1	87	19
FMINF=0.5 SMINF=0. ICBU=1 ICB=100									
imax=100 jmax=21 kmax=15 ngp=27720									
0.9133E-04	0.4699E-03	0.4791E-03	0.1089E-04	0.2352E-03		4	1	87	19
FMINF=0.5 SMINF=0. ICBU=1 ICB=100									
imax=100 jmax=21 kmax=15 ngp=27720									
0.9133E-04	0.4960E-03	0.5190E-03	0.1086E-04	0.2352E-03		5	1	87	19
FMINF=0.5 SMINF=0. ICBU=1 ICB=100									
imax=100 jmax=21 kmax=15 ngp=27720									
0.9133E-04	0.4793E-03	0.4699E-03	0.1083E-04	0.2352E-03		6	1	87	19
FMINF=0.5 SMINF=0. ICBU=1 ICB=100									
imax=100 jmax=21 kmax=15 ngp=27720									
0.9133E-04	0.5190E-03	0.4960E-03	0.1089E-04	0.2352E-03		7	1	87	19
FMINF=0.5 SMINF=0. ICBU=1 ICB=100									
imax=100 jmax=21 kmax=15 ngp=27720									
0.9133E-04	0.4699E-03	0.4791E-03	0.1086E-04	0.2352E-03		8	1	87	19

```

READING NASTRAN DATA: GRID COORDINATES

```

```

DIAMET = 25.12798087312228

```

```

BETGRD = 60.51058046349885DBET =-0.6894195793147446

```

```

MODAL DISPLACEMENTS: MODE 1

```

```

GMASS =2.408412999999997E-5 FREQ(hz) =221.08200000000003

```

```

FINISHED READING NASTRAN DATA

```

```

MODAL DISPLACEMENTS: MODE 2

```

GMASS =2.444044E-5 FREQ(hz) =402.1286999999993
 FINISHED READING NASTRAN DATA
 MODAL DISPLACEMENTS: MODE 3
 GMASS =1.445758000000001E-5 FREQ(hz) =698.2001999999993
 FINISHED READING NASTRAN DATA
 xa=1.467114822884277 ya=12.47803789802464 za=-1.92224411965627
 xt=2.54213610884841 yt=12.30412124827461 zt=-3.425739536709216
 xn=-3.323947690990835 yn=12.25 zn=2.751504279036567
 dxn=1.006955944440207 dyn=-0.2032965999999998 dzn=0.5720452635347399
 xa=1.467114822884277 ya=12.47803789802464 za=-1.92224411965627
 xt=2.54213610884841 yt=12.30412124827461 zt=-3.425739536709216
 xn=-3.323947690990835 yn=12.25 zn=2.751504279036567
 dxn=1.006955944440207 dyn=-0.2032965999999998 dzn=0.5720452635347399
 xa=1.467114822884277 ya=12.47803789802464 za=-1.92224411965627
 xt=2.54213610884841 yt=12.30412124827461 zt=-3.425739536709216
 xn=-3.323947690990835 yn=12.25 zn=2.751504279036567
 dxn=1.006955944440207 dyn=-0.2032965999999998 dzn=0.5720452635347399
 * tip radius for structural model (inches)=12.56399043656114
 Newmark constants
 0.50000E+00 0.25000E+00
 0.44444E+06 0.66667E+03
 0.13333E+04 0.10000E+01
 0.10000E+01 0.00000E+00
 0.15000E-02 0.15000E-02
 * airmas -4.825258216178407E-2
 analysis using 3 modes:

mode	freq(hz)	structural model
		gen. mass
1	221.08	0.2408E-04
1	2.68	0.4991E-03
2	402.13	0.2444E-04
2	4.87	0.5065E-03
3	698.20	0.1446E-04
3	8.45	0.2996E-03

mass, damping and stiffness matrices	
0.49913E-03	0.00000E+00
0.00000E+00	
0.00000E+00	0.00000E+00
0.00000E+00	
0.35763E-02	0.00000E+00
0.00000E+00	
0.00000E+00	0.50651E-03
0.00000E+00	
0.00000E+00	0.00000E+00
0.00000E+00	
0.00000E+00	0.12007E-01
0.00000E+00	
0.00000E+00	0.00000E+00
0.29962E-03	
0.00000E+00	0.00000E+00
0.00000E+00	
0.00000E+00	0.00000E+00
0.21412E-01	
0.20035E+04	0.00000E+00
0.00000E+00	
0.45078E-02	0.00000E+00
0.00000E+00	
0.00000E+00	0.19743E+04
0.00000E+00	
0.00000E+00	0.44419E-02


```

0.00000E+00
0.00000E+00 0.00000E+00
0.33375E+04
0.00000E+00 0.00000E+00
0.75082E-02
finished job in routine strdat
NUMBER OF TIME STEPS FOR ONE REVOLUTION = 2366
0.9128E-04 0.4792E-03 0.5099E-03 0.1789E-04 0.2352E-03 1 1 87 19 5
0.9134E-04 0.4780E-03 0.4589E-03 0.9718E-05 0.2351E-03 2 1 87 19 5
0.9134E-04 0.5099E-03 0.4792E-03 0.9718E-05 0.2351E-03 3 1 87 19 5
0.9134E-04 0.4589E-03 0.4783E-03 0.9721E-05 0.2351E-03 4 1 87 19 5
0.9134E-04 0.4792E-03 0.5099E-03 0.9718E-05 0.2351E-03 5 1 87 19 5
0.9134E-04 0.4781E-03 0.4589E-03 0.9708E-05 0.2351E-03 6 1 87 19 5
0.9134E-04 0.5099E-03 0.4792E-03 0.9717E-05 0.2351E-03 7 1 87 19 5
0.9266E-04 0.4589E-03 0.4780E-03 0.1294E-04 0.2375E-03 8 1 75 19 12

```

.....

*** Several lines deleted ***

.....

```

0.1001E-03 0.4701E-03 0.5106E-03 0.5461E-04 0.2498E-03 1 1 57 19 3
0.9166E-04 0.4786E-03 0.4549E-03 0.9770E-05 0.2358E-03 2 1 87 19 5
0.9133E-04 0.5106E-03 0.4702E-03 0.9766E-05 0.2351E-03 3 1 87 19 5
0.9134E-04 0.4549E-03 0.4789E-03 0.9768E-05 0.2351E-03 4 1 87 19 5
0.9134E-04 0.4702E-03 0.5106E-03 0.9770E-05 0.2351E-03 5 1 87 19 5
0.9134E-04 0.4787E-03 0.4549E-03 0.9761E-05 0.2351E-03 6 1 87 19 5
0.9133E-04 0.5106E-03 0.4702E-03 0.9750E-05 0.2351E-03 7 1 87 19 5
0.9022E-04 0.4548E-03 0.4782E-03 0.6855E-04 0.2335E-03 8 1 96 19 5
AVERAGE RESIDUES -- 0.10422E-04 0.94427E-04 0.59368E-04 0.23709E-05 0.26136E-04 50
AVERAGE RESIDUES -- 0.93903E-05 0.76885E-04 0.72796E-04 0.51911E-06 0.23695E-04 50
AVERAGE RESIDUES -- 0.93397E-05 0.60382E-04 0.93388E-04 0.55192E-06 0.23579E-04 50
AVERAGE RESIDUES -- 0.93426E-05 0.72811E-04 0.76893E-04 0.55018E-06 0.23586E-04 50
AVERAGE RESIDUES -- 0.93426E-05 0.93389E-04 0.60382E-04 0.55025E-06 0.23586E-04 50
AVERAGE RESIDUES -- 0.93425E-05 0.76891E-04 0.72811E-04 0.55001E-06 0.23586E-04 50
AVERAGE RESIDUES -- 0.93478E-05 0.60385E-04 0.93383E-04 0.54852E-06 0.23600E-04 50
AVERAGE RESIDUES -- 0.86257E-05 0.74324E-04 0.76505E-04 0.17039E-05 0.21686E-04 50

```

.....

*** Several lines deleted ***

.....

```

AVERAGE RESIDUES -- 0.12508E-04 0.68796E-04 0.82139E-04 0.10539E-04 0.30912E-04 7950
AVERAGE RESIDUES -- 0.11258E-04 0.61095E-04 0.93969E-04 0.10654E-04 0.26676E-04 7950
AVERAGE RESIDUES -- 0.14379E-04 0.80000E-04 0.70202E-04 0.74903E-05 0.36416E-04 7950
AVERAGE RESIDUES -- 0.84930E-05 0.91446E-04 0.61047E-04 0.43891E-05 0.20800E-04 7950
AVERAGE RESIDUES -- 0.96556E-05 0.70421E-04 0.81208E-04 0.61106E-05 0.24255E-04 7950
AVERAGE RESIDUES -- 0.15393E-04 0.59245E-04 0.90663E-04 0.75361E-05 0.38168E-04 7950
AVERAGE RESIDUES -- 0.89042E-05 0.83294E-04 0.69165E-04 0.65000E-05 0.22093E-04 7950
AVERAGE RESIDUES -- 0.13298E-04 0.93682E-04 0.58869E-04 0.78136E-05 0.33323E-04 7950
0.2186E-03 0.5275E-03 0.4764E-03 0.2001E-03 0.4253E-03 1 1 36 19 2
0.2057E-03 0.5229E-03 0.5073E-03 0.2583E-03 0.3591E-03 2 1 36 20 2
0.2290E-03 0.4785E-03 0.4538E-03 0.2527E-03 0.4494E-03 3 1 36 20 2
0.1063E-03 0.5069E-03 0.5124E-03 0.2112E-03 0.2737E-03 4 1 76 19 12
0.9918E-04 0.4570E-03 0.4789E-03 0.3323E-03 0.2525E-03 5 1 85 19 4
0.1919E-03 0.5113E-03 0.5066E-03 0.2416E-03 0.3848E-03 6 1 36 20 2
0.1187E-03 0.4763E-03 0.5489E-03 0.2836E-03 0.3118E-03 7 1 73 19 12
0.1103E-03 0.5072E-03 0.5222E-03 0.2679E-03 0.2567E-03 8 1 79 19 3
0.1167E-03 0.5503E-03 0.4603E-03 0.2063E-03 0.2690E-03 1 1 69 19 3
0.2208E-03 0.5182E-03 0.4842E-03 0.2654E-03 0.4349E-03 2 1 36 20 2
0.1545E-03 0.4621E-03 0.4572E-03 0.2416E-03 0.2841E-03 3 1 36 20 2
0.1413E-03 0.4841E-03 0.5093E-03 0.2166E-03 0.2972E-03 4 1 36 20 2
0.1070E-03 0.4547E-03 0.4629E-03 0.3359E-03 0.2704E-03 5 1 80 19 12

```

0.1294E-03	0.5060E-03	0.4841E-03	0.2480E-03	0.2732E-03	6	1	36	20	2
0.2342E-03	0.4609E-03	0.5613E-03	0.2973E-03	0.4833E-03	7	1	36	20	2
0.1244E-03	0.4842E-03	0.5151E-03	0.2662E-03	0.3245E-03	8	1	74	19	12
0.1100E-03	0.5845E-03	0.4554E-03	0.2193E-03	0.2703E-03	1	1	69	19	3
AVERAGE RESIDUES -- 0.97012E-05 0.72323E-04 0.79942E-04 0.80464E-05					0.24133E-04	8000			
0.1685E-03	0.5196E-03	0.4762E-03	0.2767E-03	0.3248E-03	2	1	36	19	2
AVERAGE RESIDUES -- 0.11450E-04 0.60001E-04 0.95678E-04 0.90727E-05					0.27893E-04	8000			
0.1290E-03	0.4577E-03	0.4830E-03	0.2356E-03	0.2767E-03	3	1	36	20	2
AVERAGE RESIDUES -- 0.13743E-04 0.75930E-04 0.73444E-04 0.78424E-05					0.34488E-04	8000			
0.1584E-03	0.4761E-03	0.5135E-03	0.2263E-03	0.3278E-03	4	1	36	20	2
AVERAGE RESIDUES -- 0.84989E-05 0.93635E-04 0.60963E-04 0.52355E-05					0.20417E-04	8000			
0.1089E-03	0.4476E-03	0.4588E-03	0.3437E-03	0.2771E-03	5	1	79	19	12
AVERAGE RESIDUES -- 0.10588E-04 0.74576E-04 0.75682E-04 0.51431E-05					0.26960E-04	8000			
0.1183E-03	0.5087E-03	0.4794E-03	0.2538E-03	0.2675E-03	6	1	36	20	2
AVERAGE RESIDUES -- 0.14380E-04 0.59892E-04 0.91212E-04 0.84383E-05					0.35487E-04	8000			
0.2638E-03	0.4564E-03	0.5467E-03	0.3164E-03	0.5363E-03	7	1	36	20	2
AVERAGE RESIDUES -- 0.10164E-04 0.79982E-04 0.73428E-04 0.88942E-05					0.24580E-04	8000			
0.1221E-03	0.4760E-03	0.5148E-03	0.2678E-03	0.3217E-03	8	1	72	19	12
AVERAGE RESIDUES -- 0.16395E-04 0.93497E-04 0.59681E-04 0.78912E-05					0.41033E-04	8000			
ISTP= 8000 IB = 1 IROW = 1 TIME = 51.0000									

J= 1 Y= 0.2431 CL= 0.0073 CD= 0.1670 CM= 0.0141

OPILOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

O	X	X/CL	X/CU	CPL	CPU				
-0.0725	0.0000	0.0000	0.8522	-0.2085	*		I	+	
-0.0709	0.0093	0.0107	0.8690	-0.0716	*		I	+	
-0.0692	0.0198	0.0227	0.6353	-0.3704		*	I		+
-0.0672	0.0317	0.0363	0.6107	-0.2992		*	I		+
-0.0649	0.0450	0.0516	0.3616	-0.6869			I		+
-0.0624	0.0606	0.0682	0.3736	-0.4807		*	I		+
-0.0595	0.0781	0.0868	0.3016	-0.4620		*	I		+
-0.0563	0.0980	0.1079	0.2856	-0.3488		*	I		+
-0.0527	0.1203	0.1315	0.2516	-0.2686		*	I		+
-0.0487	0.1455	0.1581	0.2299	-0.1825		*	I	+	
-0.0441	0.1739	0.1881	0.1996	-0.1226		*	I	+	
-0.0389	0.2059	0.2218	0.1457	-0.1149		*	I	+	
-0.0331	0.2419	0.2597	0.0601	-0.1646		*	I	+	
-0.0260	0.2864	0.3065	-0.0414	-0.2173			I*	+	
-0.0188	0.3310	0.3533	-0.1341	-0.2443			I	*	+
-0.0116	0.3756	0.3999	-0.2014	-0.2587			I	*	+
-0.0045	0.4203	0.4463	-0.2383	-0.2694			I	*	+
0.0027	0.4654	0.4923	-0.2258	-0.2458			I	*	
0.0098	0.5113	0.5376	-0.1730	-0.1875			I	++	
0.0170	0.5578	0.5823	-0.1355	-0.1479			I	*	
0.0241	0.6044	0.6267	-0.1374	-0.1480			I	*	
0.0313	0.6511	0.6709	-0.1332	-0.1451			I	*	
0.0384	0.6978	0.7149	-0.1147	-0.1277			I	++	
0.0455	0.7443	0.7591	-0.0867	-0.1013			I	*	
0.0513	0.7819	0.7948	-0.0615	-0.0715			I	*	
0.0564	0.8154	0.8263	-0.0388	-0.0490			I*		
0.0609	0.8452	0.8543	-0.0214	-0.0329			I*		
0.0649	0.8716	0.8791	-0.0049	-0.0155			*		
0.0685	0.8950	0.9012	0.0130	0.0049			*		
0.0717	0.9158	0.9208	0.0346	0.0276			*I		
0.0745	0.9343	0.9382	0.0596	0.0582			*I		
0.0770	0.9508	0.9536	0.0919	0.0901			*I		
0.0792	0.9653	0.9674	0.1219	0.1300			*I		
0.0812	0.9783	0.9795	0.1587	0.1694			*I		
0.0829	0.9898	0.9904	0.1903	0.2181			++		
0.0845	1.0000	1.0000	0.2315	0.2625			++		

J= 2 Y= 0.2642 CL= 0.0017 CD= 0.1671 CM= 0.0101

OPILOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

0	X	X/CL	X/CU	CPL	CPU				
-0.0784	0.0000	0.0000	0.8454	-0.2070	*		I	+	
-0.0768	0.0093	0.0107	0.8620	-0.0711	*		I	+	
-0.0750	0.0198	0.0227	0.6303	-0.3676		*	I		+

.....

*** Several lines deleted ***

.....

0.0781	0.9784	0.9793	0.1573	0.1679		*	I	
0.0799	0.9898	0.9903	0.1886	0.2162		*	I	
0.0814	1.0000	1.0000	0.2295	0.2602		++	I	

.....

*** Several sets of pressure coefficient output deleted ***

.....

J= 20 Y= 1.0000 CL= 0.3100 CD= 0.4032 CM= 0.0048

OPILOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

0	X	X/CL	X/CU	CPL	CPU				
0.0765	0.0000	0.0000	0.3912	-1.1560		*	I		+
0.0771	0.0088	0.0103	0.3909	-1.0886		*	I		+
0.0777	0.0187	0.0218	0.3750	-1.0518		*	I		+

.....

*** Several lines deleted ***

.....

0.1350	0.9769	0.9785	0.1010	-0.0005		*	I+	
0.1357	0.9892	0.9899	0.1052	0.0082		*	+	
0.1363	1.0000	1.0000	0.1109	0.0159		*	+	

ISTP= 8000 IB = 2 IROW = 1 TIME = 51.0000

J= 1 Y= 0.2431 CL= 0.0051 CD= 0.1425 CM= 0.0149

OPILOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

0	X	X/CL	X/CU	CPL	CPU				
-0.0725	0.0000	0.0000	0.8482	-0.2096	*		I	+	
-0.0709	0.0093	0.0107	0.8636	-0.0715	*		I	+	
-0.0692	0.0198	0.0227	0.6297	-0.3720		*	I		+

.....

*** Several lines deleted ***

.....

0.0812	0.9783	0.9795	0.1528	0.1766		*	I	
0.0829	0.9898	0.9904	0.1858	0.2244		++	I	
0.0845	1.0000	1.0000	0.2275	0.2684		++	I	

.....

*** Several sets of pressure coefficient output deleted ***

.....

J= 20 Y= 1.0000 CL= 0.2602 CD= 0.3402 CM= 0.0055

O PLOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

O	X	X/CL	X/CU	CPL	CPU			
0	0.0765	0.0000	0.0000	0.3321	-0.8697	*	I	+
	0.0771	0.0088	0.0103	0.3229	-0.8131	*	I	+
	0.0777	0.0187	0.0218	0.3168	-0.7989	*	I	+

.....

*** Several lines deleted ***

.....

0.1350	0.9769	0.9785	0.1105	0.0306	*	+
0.1357	0.9892	0.9899	0.1124	0.0426	*	+I
0.1363	1.0000	1.0000	0.1198	0.0490	*	+I

.....

*** Pressure coefficient output for blades 3,4,5,6 and 7 deleted ***

.....

ISTP= 8000 IB = 8 IROW = 1 TIME = 51.0000

J= 1 Y= 0.2431 CL= 0.0051 CD= 0.1407 CM= 0.0138

O PLOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

O	X	X/CL	X/CU	CPL	CPU			
0	-0.0725	0.0000	0.0000	0.8471	-0.1939	*	I	+
	-0.0709	0.0093	0.0107	0.8625	-0.0585	*	I	+
	-0.0692	0.0198	0.0227	0.6279	-0.3568	*	I	+

.....

*** Several lines deleted ***

.....

0.0812	0.9783	0.9795	0.1588	0.1792	*	I
0.0829	0.9898	0.9904	0.1914	0.2273	+	I
0.0845	1.0000	1.0000	0.2326	0.2717	+	I

.....

*** Several sets of pressure coefficient output deleted ***

.....

J= 20 Y= 1.0000 CL= 0.2786 CD= 0.3648 CM= 0.0061

O PLOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

O	X	X/CL	X/CU	CPL	CPU			
0	0.0765	0.0000	0.0000	0.3518	-0.9005	*	I	+
	0.0771	0.0088	0.0103	0.3445	-0.8436	*	I	+
	0.0777	0.0187	0.0218	0.3373	-0.8306	*	I	+

.....

*** Several lines deleted ***

.....

```

0.1350 0.9769 0.9785 0.1209 0.0342          * +I
0.1357 0.9892 0.9899 0.1227 0.0460          * +I
0.1363 1.0000 1.0000 0.1291 0.0530          * +I
FOR THE SINGLE ROTATION PROPFAN :
  ADVANCE RATIO =          3.55000000
  POWER COEFFICIENT =       1.92997793
  THRUST COEFFICIENT =      0.12837285
  EFFICIENCY =             0.23612892
inlet mach no.= 0.477 u= 0.0001 v= 0.0000 w= -0.4770 q1= 1.0159 p= 0.7303 r= 0.01000 j= 1
exit mach no.= 0.475 u= 0.0320 v= -0.0336 w= -0.4723 q1= 1.0274 p= 0.7143 r= 0.15465 j= 1
inlet mach no.= 0.484 u= 0.0014 v= 0.0018 w= -0.4842 q1= 1.0159 p= 0.7303 r= 0.02469 j= 2
exit mach no.= 0.493 u= 0.0299 v= -0.0364 w= -0.4903 q1= 1.0274 p= 0.7143 r= 0.16501 j= 2
.....
*** Several lines deleted ***
.....
inlet mach no.= 0.478 u= -0.0041 v= -0.0039 w= -0.4780 q1= 1.0231 p= 0.7371 r= 0.49923 j= 20
exit mach no.= 0.582 u= 0.0370 v= -0.0841 w= -0.5751 q1= 0.9527 p= 0.7143 r= 0.49994 j= 20
inlet mach no.= 0.466 u= 0.0069 v= 0.0104 w= -0.4659 q1= 1.0231 p= 0.7371 r= 0.50200 j= 21
exit mach no.= 0.587 u= 0.0597 v= -0.0581 w= -0.5810 q1= 0.9527 p= 0.7143 r= 0.50200 j= 21
Relative Mach No. at Tip =0.8592039059919863
Relative Mach No. at Tip (Mid Plane)=0.6531971713379576
rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999
rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999
rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999
rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999
rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999
rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999
rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999
rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999
The Following Quantities are at I =5 Z=1.102164637904551
Mass Flow Rate =-0.2362110693740211 (lb/s) Corrected =-0.2383192278077946 (lb/s @ 518.7R & 14.7psi)
The Following Quantities are at I =50 Z=2.053126919559777E-2
Mass Flow Rate =-0.2182021680198378 (lb/s) Corrected =-0.2201495989425197 (lb/s @ 518.7R & 14.7psi)
The Following Quantities are at I =95 Z=-0.8030763509607972
Mass Flow Rate =-0.23538939944868 (lb/s) Corrected =-0.2374902245665869 (lb/s @ 518.7R & 14.7psi)
TIME/ITERATION =5.054890234375279

```

UNIT 57 (output file; contains blade motion)

1	1	0.30000E-02	0.00000E+00	0.00000E+00	0.00000E+00
1	1	0.30000E-02	-0.30000E-04	-0.29998E-04	-0.29995E-04
1	2	0.30000E-02	0.00000E+00	0.00000E+00	0.00000E+00
1	2	0.30000E-02	0.00000E+00	0.00000E+00	0.00000E+00
1	3	0.30000E-02	0.00000E+00	0.00000E+00	0.00000E+00
1	3	0.30000E-02	0.00000E+00	0.00000E+00	0.00000E+00
1	4	0.30000E-02	0.00000E+00	0.00000E+00	0.00000E+00
1	4	0.30000E-02	0.00000E+00	0.00000E+00	0.00000E+00
1	5	0.30000E-02	0.00000E+00	0.00000E+00	0.00000E+00
1	5	0.30000E-02	0.00000E+00	0.00000E+00	0.00000E+00
1	6	0.30000E-02	0.00000E+00	0.00000E+00	0.00000E+00
1	6	0.30000E-02	0.00000E+00	0.00000E+00	0.00000E+00
1	7	0.30000E-02	0.00000E+00	0.00000E+00	0.00000E+00
1	7	0.30000E-02	0.00000E+00	0.00000E+00	0.00000E+00
1	8	0.30000E-02	0.00000E+00	0.00000E+00	0.00000E+00
1	8	0.30000E-02	0.00000E+00	0.00000E+00	0.00000E+00
2	1	0.60000E-02	-0.59998E-04	-0.59994E-04	-0.59981E-04
2	2	0.60000E-02	-0.18703E-09	0.87707E-10	0.11198E-09
2	3	0.60000E-02	-0.18633E-09	0.88173E-10	0.11238E-09
2	4	0.60000E-02	-0.18629E-09	0.88153E-10	0.11231E-09
2	5	0.60000E-02	-0.18630E-09	0.88155E-10	0.11231E-09
2	6	0.60000E-02	-0.18640E-09	0.88187E-10	0.11250E-09

2	7	0.60000E-02	-0.18645E-09	0.88196E-10	0.11256E-09
2	8	0.60000E-02	-0.18954E-09	0.84927E-10	0.10935E-09

.....

*** 31960 lines of output deleted ***

.....

7999	1	0.23997E+02	-0.17842E-01	-0.24180E-02	-0.11148E-02
7999	2	0.23997E+02	0.23842E-01	0.76851E-03	0.12358E-02
7999	3	0.23997E+02	-0.17483E-01	0.75404E-03	-0.63258E-03
7999	4	0.23997E+02	0.63099E-02	-0.16356E-02	0.47851E-04
7999	5	0.23997E+02	0.66070E-02	0.87060E-03	0.44963E-03
7999	6	0.23997E+02	-0.13214E-01	0.87076E-03	-0.43357E-03
7999	7	0.23997E+02	0.11088E-01	-0.26762E-02	0.79512E-04
7999	8	0.23997E+02	0.30939E-02	0.30853E-02	0.63468E-03
8000	1	0.24000E+02	-0.17607E-01	-0.24526E-02	-0.11112E-02
8000	2	0.24000E+02	0.23703E-01	0.80490E-03	0.12362E-02
8000	3	0.24000E+02	-0.17481E-01	0.73137E-03	-0.63683E-03
8000	4	0.24000E+02	0.64080E-02	-0.16337E-02	0.53163E-04
8000	5	0.24000E+02	0.65176E-02	0.88483E-03	0.44746E-03
8000	6	0.24000E+02	-0.13243E-01	0.85234E-03	-0.43733E-03
8000	7	0.24000E+02	0.11262E-01	-0.26692E-02	0.88096E-04
8000	8	0.24000E+02	0.28443E-02	0.31009E-02	0.62577E-03

UNIT 98 (output file; contains performance characteristics)

ITERATION	CP	CT	EFF
1,	1.92620107182389,	0.1275021397257223,	0.2349871997515409
2,	1.926114049173954,	0.1274739896345745,	0.2349459334439805
3,	1.926289471125479,	0.1275160234299531,	0.2350020025348751
4,	1.926291492274117,	0.1275060683057845,	0.2349834094689145
5,	1.926474934642208,	0.1275499018171331,	0.2350418078680683
6,	1.926484118524925,	0.127541577318123,	0.2350253475362241
7,	1.926673880349846,	0.127586869910183,	0.235085653467678
8,	1.926688548735548,	0.1275798366527328,	0.2350709046433259
9,	1.926883023202492,	0.1276262620111526,	0.2351327115781965
10,	1.926901589167571,	0.127620196140664,	0.2351192706707348

.....

*** 7980 output lines deleted ***

.....

7991,	1.930040822740146,	0.1283892422466169,	0.236151383227428
7992,	1.929955963471393,	0.1283639661860363,	0.2361152733976279
7993,	1.930046459725382,	0.1283914194507298,	0.2361546981179634
7994,	1.9299615656981,	0.1283661552163595,	0.2361186145451768
7995,	1.930052027836766,	0.1283936205662055,	0.2361580653972801
7996,	1.929967096753209,	0.1283683669098066,	0.2361220060675935
7997,	1.93005752221741,	0.1283958430210248,	0.2361614809288026
7998,	1.929972551902672,	0.1283705986969279,	0.2361254438177509
7999,	1.930062938632268,	0.1283980843338659,	0.2361649406667707
8000,	1.929977927285918,	0.1283728481678734,	0.2361289238353228

6.3 Frequency Domain Aeroelastic Analysis of an Isolated Fan Row

Description:

A test case for frequency domain aeroelastic analysis for all the possible interblade phase angles is provided here. The fan analyzed has eight blades and first three normal modes are included in the

analysis. It is identical to the case analyzed using time domain method, for which the sample case was presented in section 6.2. Again, as mentioned in section 6.2, a steady aerodynamic solution is first generated using the sample case provided in 6.1 for the desired flow conditions. The aeroelastic analysis is then carried out by restarting the solution from the steady aerodynamic solution. In order to carry out the aeroelastic analysis, the structural grid (UNIT 3) and structural mode shapes (UNIT 4) are needed. The input file for this analysis is very similar to the steady aerodynamic analysis with changes in the lines shown below in the input file **ducte3d.inp**. The input variables **RESTART** and **AEROELASTIC** are set to **TRUE**, **IFLTR** is set to a positive integer, **NSTDY** to 2 and **NBLOKS** to 8. The input variable **VIBFRE** is the non-dimensional time for the duration of the pulse and **JMODE** is the mode number in which the blade is oscillated. The variables that need to be changed are indicated in bold print. All other input parameters remain the same as used in the steady aerodynamic analysis. The example given here was restarted from the steady solution presented in section 6.1 and was obtained by running the code for 9000 time steps with $dt=0.003$.

For starting the aeroelastic solution, the file generated in the steady analysis run, UNIT 31, is linked to UNIT 11. For an aeroelastic restart, i.e. restarting the solution from a previous aeroelastic solution, the only change required is to link the files generated on UNITS 30+n by the previous aeroelastic analysis to UNITS 10+n of the current analysis. The analysis is repeated with the variable **JMODE** varying over the number of normal modes included in the analysis.

In addition to UNIT 98, other output files are generated in the analysis. The output file on UNIT 57 contains the time history of the prescribed normal mode displacement for the reference blade. Since three modes are included in the analysis, the analysis is carried out for a total of three times, once each for vibration of the reference blade in each of the three modes, *i. e.* once each for **JMODE** = 1, 2, & 3. Files on UNITS 93 through 95 contain the generalized forces for the three different modes due to oscillation in the given mode (**JMODE**). In all, nine files containing generalized forces, three files each corresponding to the three modes, are generated. These nine files along with the output file on UNIT 57 are Fourier analyzed using a post processor to provide the variation of aerodynamic damping with frequency for each of the three modes and for all possible interblade phase angles.

UNIT 5 (ducte3d.inp; input file)

SR3D Only one direction marching (from root to tip)

.....

*** same as steady aerodynamic input, see section 6.1 ***

.....

FSTP	FMINF	BETA34	DIA	DX	DZ	VIBFRE
4000.0	0.500	61.20	1.0	0.01	0.030	1.8
ICCW	ITURB	LTHIN	IGR	ISWF		
1	0	0	0	0		

RESTART , **QUASISTEADY** , **INFLOW** , **AEROELASTIC**, **COUNTER ROTATION**, **RESABD**, **DUCT**
TRUE TRUEFALSE TRUEFALSEFALSE TRUE

IFLTR	NUMCYC	NSTDY	JMODE	NBLOKS
1	0	2	1	8

FNRS

.....

*** same as steady aerodynamic input, see section 6.1 ***

.....

UNIT 6 (ducte3d.out; output file)

```
1      SR3-Ducted Propfan, flat plate infinite duct
*****
*      aeroelastic stability analysis      *
*      using normal mode structural model  *
*      with Euler aerodynamic model in    *
*      FREQUENCY DOMAIN                   *
*      using Pulse Motion                  *
*****
+++++
+ atmospheric conditions
-----
+ pressure=14.699999999999999
+ speed of sound (in/sec)=13040.
+ density=1.210292069705291E-7
+++++
* operating conditions:
-----
* rotor speed(rpm)=0.
* rotor speed(rad/sec)=0.
* Mach no.= 0.5
* advance ratio (J).= 3.549999999999997
* tip radius (inches)=0.5
-----
```

RESTART RUN FROM A PREVIOUS SOLUTION

FRONT BLADE ROW ROTATING IN COUNTER CLOCKWISE DIRN.

CONTRAVARIANT VELOCITIES EXTRAPOLATED ON SOLID SURFACES

RADIAL MOMENTUM EQUILLIBRIUM APPLIED ON DOWNSTREAM BOUNDARY

CHARACTERISTICS USED TO UPDATE UPSTREAM BOUNDARY

IN DISSIPATION SUBROUTINE THE COEFFICIENTS ARE :

IJDIS = 2

IKDIS = 1

IJ2 = 0

IIDIS = 1

IHPQ = 1

WWY COEFFICIENT IN DIS2 IS -1.

ICHAR IN JBC =1

IN WALLBC THE CONSTANTS ARE :

IWHIT = 0

INL = 1

IEX = 2

JEX = 1

INRES =0

IHORD =0

KHORD =0

ISMTH =0

KSMTH =0

IVIBR =1

WWF =100.

IMAX= 100

JMAX= 21

KMAX= 16


```

JTIP=      20
ITEL=      71
ILE =      36
INOSE=     16
NSTEP=    4000
DX =       0.01000000
DZ =       0.03000000
DT=        0.00300000
WW=        7.00000000
ALFA=      0.00000000
AMTIP=     0.44247784
FMINF=     0.50000000
ADVANCE RATIO = 3.55000000
vibration freq. = 1.80000000
VIBRATING IN 1 MODE

```

```

GMU=      0.00000000
**** NSTDY =2
**** JMODE =1
cosa=1. sina=0.
NUMBER OF TIME STEPS FOR ONE CYCLE = 1163
TOTAL NUMBER OF STEPS FOR 0 CYCLES =4000
TOTAL NUMBER OF STEPS 4000
reyref=-1000000. reynum=0.
FMINF=0.5 SMINF=0. ICBU=1 ICB=100
imax=100 jmax=21 kmax=15 ngp=27720
MAX JACOB=7.999591762776047E-5 MIN JACOB=8.441722412234353E-9 AT 20
IJMAX=2 KJMAX=8 IJMIN=36 KJMIN=2
MAX JACOB=1.151533808997819E-4 MIN JACOB=1.291499186729728E-8 AT 19
IJMAX=2 KJMAX=8 IJMIN=36 KJMIN=2

```

*** Several lines of Jacobian output deleted ***

```

MAX JACOB=7.990930162917559E-5 MIN JACOB=1.406906985237722E-7 AT 3
IJMAX=99 KJMAX=8 IJMIN=71 KJMIN=14
MAX JACOB=5.501060715851278E-5 MIN JACOB=1.043742011269572E-7 AT 2
IJMAX=99 KJMAX=8 IJMIN=71 KJMIN=14

```

DRMAX	DUMAX	DVMAX	DWMAX	DEMAX	IB	IROW	IR	JR	KR	
0.9133E-04	0.4960E-03	0.5190E-03	0.1082E-04	0.2352E-03		1	1	87	19	5
FMINF=0.5 SMINF=0. ICBU=1 ICB=100										
imax=100 jmax=21 kmax=15 ngp=27720										
0.9133E-04	0.4793E-03	0.4699E-03	0.1087E-04	0.2352E-03		2	1	87	19	5
FMINF=0.5 SMINF=0. ICBU=1 ICB=100										
imax=100 jmax=21 kmax=15 ngp=27720										
0.9133E-04	0.5190E-03	0.4960E-03	0.1089E-04	0.2352E-03		3	1	87	19	5
FMINF=0.5 SMINF=0. ICBU=1 ICB=100										
imax=100 jmax=21 kmax=15 ngp=27720										
0.9133E-04	0.4699E-03	0.4791E-03	0.1089E-04	0.2352E-03		4	1	87	19	5
FMINF=0.5 SMINF=0. ICBU=1 ICB=100										
imax=100 jmax=21 kmax=15 ngp=27720										
0.9133E-04	0.4960E-03	0.5190E-03	0.1086E-04	0.2352E-03		5	1	87	19	5
FMINF=0.5 SMINF=0. ICBU=1 ICB=100										
imax=100 jmax=21 kmax=15 ngp=27720										
0.9133E-04	0.4793E-03	0.4699E-03	0.1083E-04	0.2352E-03		6	1	87	19	5
FMINF=0.5 SMINF=0. ICBU=1 ICB=100										
imax=100 jmax=21 kmax=15 ngp=27720										
0.9133E-04	0.5190E-03	0.4960E-03	0.1089E-04	0.2352E-03		7	1	87	19	5
FMINF=0.5 SMINF=0. ICBU=1 ICB=100										
imax=100 jmax=21 kmax=15 ngp=27720										
0.9133E-04	0.4699E-03	0.4791E-03	0.1086E-04	0.2352E-03		8	1	87	19	5

```

READING NASTRAN DATA: GRID COORDINATES
DIAMET = 25.12798087312228
BETGRD = 60.51058046349885DBET --0.6894195793147446
MODAL DISPLACEMENTS: MODE 1
GMASS =2.408412999999997E-5 FREQ(hz) -221.0820000000003
FINISHED READING NASTRAN DATA
MODAL DISPLACEMENTS: MODE 2
GMASS =2.444044E-5 FREQ(hz) -402.1286999999993
FINISHED READING NASTRAN DATA
MODAL DISPLACEMENTS: MODE 3
GMASS =1.445758000000001E-5 FREQ(hz) -698.2001999999993
FINISHED READING NASTRAN DATA
xa=1.467114822884277 ya=12.47803789802464 za=-1.92224411965627
xt=2.54213610884841 yt=12.30412124827461 zt=-3.425739536709216
xn=-3.323947690990835 yn=12.25 zn=2.751504279036567
dxn=1.006955944440207 dyn=-0.2032965999999998 dzn=0.5720452635347399
xa=1.467114822884277 ya=12.47803789802464 za=-1.92224411965627
xt=2.54213610884841 yt=12.30412124827461 zt=-3.425739536709216
xn=-3.323947690990835 yn=12.25 zn=2.751504279036567
dxn=1.006955944440207 dyn=-0.2032965999999998 dzn=0.5720452635347399
* tip radius for structural model (inches)=12.56399043656114
NUMBER OF TIME STEPS FOR ONE REVOLUTION = 2366
IGFCAL =0
IGFCAL =0
IGFCAL =0
IGFCAL =0
IGFCAL =0
IGFCAL =0
IGFCAL =0
IGFCAL =0
0.9134E-04 0.4792E-03 0.5099E-03 0.9708E-05 0.2351E-03 1 1 87 19 5
0.9134E-04 0.4780E-03 0.4589E-03 0.9718E-05 0.2351E-03 2 1 87 19 5
0.9134E-04 0.5099E-03 0.4792E-03 0.9718E-05 0.2351E-03 3 1 87 19 5
0.9134E-04 0.4589E-03 0.4783E-03 0.9721E-05 0.2351E-03 4 1 87 19 5
0.9134E-04 0.4792E-03 0.5099E-03 0.9718E-05 0.2351E-03 5 1 87 19 5
0.9134E-04 0.4781E-03 0.4589E-03 0.9708E-05 0.2351E-03 6 1 87 19 5
0.9134E-04 0.5099E-03 0.4792E-03 0.9717E-05 0.2351E-03 7 1 87 19 5
0.9134E-04 0.4589E-03 0.4783E-03 0.9714E-05 0.2351E-03 8 1 87 19 5
.....
*** Several output lines deleted ***
.....
0.9134E-04 0.4702E-03 0.5106E-03 0.1262E-04 0.2352E-03 1 1 87 19 5
0.9134E-04 0.4787E-03 0.4549E-03 0.9771E-05 0.2351E-03 2 1 87 19 5
0.9134E-04 0.5106E-03 0.4702E-03 0.9766E-05 0.2351E-03 3 1 87 19 5
0.9134E-04 0.4549E-03 0.4789E-03 0.9768E-05 0.2351E-03 4 1 87 19 5
0.9134E-04 0.4702E-03 0.5106E-03 0.9770E-05 0.2351E-03 5 1 87 19 5
0.9134E-04 0.4787E-03 0.4549E-03 0.9761E-05 0.2351E-03 6 1 87 19 5
0.9134E-04 0.5106E-03 0.4702E-03 0.9765E-05 0.2351E-03 7 1 87 19 5
0.9140E-04 0.4549E-03 0.4789E-03 0.1345E-04 0.2353E-03 8 1 87 19 5
AVERAGE RESIDUES -- 0.92106E-05 0.93287E-04 0.60442E-04 0.68117E-06 0.23261E-04 50
AVERAGE RESIDUES -- 0.93402E-05 0.76889E-04 0.72812E-04 0.55098E-06 0.23580E-04 50
AVERAGE RESIDUES -- 0.93426E-05 0.60381E-04 0.93388E-04 0.55016E-06 0.23586E-04 50
AVERAGE RESIDUES -- 0.93426E-05 0.72811E-04 0.76893E-04 0.55036E-06 0.23586E-04 50
AVERAGE RESIDUES -- 0.93426E-05 0.93388E-04 0.60382E-04 0.55036E-06 0.23586E-04 50
AVERAGE RESIDUES -- 0.93425E-05 0.76891E-04 0.72811E-04 0.55012E-06 0.23585E-04 50
AVERAGE RESIDUES -- 0.93415E-05 0.60377E-04 0.93389E-04 0.54986E-06 0.23583E-04 50
AVERAGE RESIDUES -- 0.94877E-05 0.72662E-04 0.76980E-04 0.64916E-06 0.23960E-04 50

```

.....

*** Several output lines deleted ***

.....

AVERAGE RESIDUES	--	0.90865E-05	0.68685E-04	0.81489E-04	0.46008E-06	0.23375E-04	3950
AVERAGE RESIDUES	--	0.91206E-05	0.91766E-04	0.61917E-04	0.43612E-06	0.23399E-04	3950
AVERAGE RESIDUES	--	0.91277E-05	0.81580E-04	0.68737E-04	0.44664E-06	0.23435E-04	3950
AVERAGE RESIDUES	--	0.91675E-05	0.61861E-04	0.91710E-04	0.43119E-06	0.23516E-04	3950
AVERAGE RESIDUES	--	0.91862E-05	0.68713E-04	0.81599E-04	0.42099E-06	0.23606E-04	3950
AVERAGE RESIDUES	--	0.91775E-05	0.91726E-04	0.61886E-04	0.41797E-06	0.23534E-04	3950
AVERAGE RESIDUES	--	0.91148E-05	0.81472E-04	0.68655E-04	0.43720E-06	0.23459E-04	3950
AVERAGE RESIDUES	--	0.91503E-05	0.61948E-04	0.91773E-04	0.43824E-06	0.23434E-04	3950
0.9147E-04		0.4529E-03	0.4977E-03	0.1325E-04	0.2355E-03	1 1 87 19	5
0.9149E-04		0.4717E-03	0.5128E-03	0.1380E-04	0.2355E-03	2 1 87 19	5
0.9149E-04		0.4984E-03	0.4528E-03	0.1429E-04	0.2355E-03	3 1 87 19	5
0.9137E-04		0.5126E-03	0.4717E-03	0.1151E-04	0.2352E-03	4 1 87 19	5
0.9127E-04		0.4527E-03	0.4976E-03	0.1031E-04	0.2349E-03	5 1 87 19	5
0.9131E-04		0.4716E-03	0.5126E-03	0.1040E-04	0.2350E-03	6 1 87 19	5
0.9132E-04		0.4998E-03	0.4528E-03	0.1039E-04	0.2351E-03	7 1 87 19	5
0.9142E-04		0.5127E-03	0.4717E-03	0.1124E-04	0.2354E-03	8 1 87 19	5
0.9128E-04		0.4575E-03	0.4896E-03	0.1347E-04	0.2350E-03	1 1 87 19	5
0.9129E-04		0.4651E-03	0.4981E-03	0.1360E-04	0.2350E-03	2 1 87 19	5
0.9130E-04		0.4896E-03	0.4574E-03	0.1501E-04	0.2351E-03	3 1 87 19	5
0.9143E-04		0.4979E-03	0.4652E-03	0.1160E-04	0.2354E-03	4 1 87 19	5
0.9149E-04		0.4573E-03	0.4896E-03	0.1032E-04	0.2355E-03	5 1 87 19	5
0.9145E-04		0.4651E-03	0.4979E-03	0.1017E-04	0.2354E-03	6 1 87 19	5
0.9141E-04		0.4896E-03	0.4574E-03	0.1021E-04	0.2353E-03	7 1 87 19	5
0.9131E-04		0.4979E-03	0.4651E-03	0.1071E-04	0.2351E-03	8 1 87 19	5
0.9128E-04		0.4692E-03	0.4940E-03	0.1358E-04	0.2350E-03	1 1 87 19	5
AVERAGE RESIDUES	--	0.90529E-05	0.65046E-04	0.85562E-04	0.45816E-06	0.23356E-04	4000
0.9129E-04		0.4667E-03	0.4891E-03	0.1402E-04	0.2350E-03	2 1 87 19	5
AVERAGE RESIDUES	--	0.91060E-05	0.88919E-04	0.63850E-04	0.43627E-06	0.23387E-04	4000
0.9131E-04		0.4940E-03	0.4690E-03	0.1563E-04	0.2351E-03	3 1 87 19	5
AVERAGE RESIDUES	--	0.91013E-05	0.85643E-04	0.65093E-04	0.44553E-06	0.23426E-04	4000
0.9144E-04		0.4889E-03	0.4667E-03	0.1232E-04	0.2355E-03	4 1 87 19	5
AVERAGE RESIDUES	--	0.91517E-05	0.63778E-04	0.88852E-04	0.42695E-06	0.23522E-04	4000
0.9148E-04		0.4689E-03	0.4940E-03	0.1032E-04	0.2355E-03	5 1 87 19	5
AVERAGE RESIDUES	--	0.91574E-05	0.65089E-04	0.85685E-04	0.41750E-06	0.23587E-04	4000
0.9145E-04		0.4666E-03	0.4890E-03	0.1018E-04	0.2354E-03	6 1 87 19	5
AVERAGE RESIDUES	--	0.91433E-05	0.88858E-04	0.63779E-04	0.41834E-06	0.23495E-04	4000
0.9140E-04		0.4940E-03	0.4690E-03	0.1022E-04	0.2352E-03	7 1 87 19	5
AVERAGE RESIDUES	--	0.90906E-05	0.85574E-04	0.65034E-04	0.43345E-06	0.23442E-04	4000
0.9131E-04		0.4889E-03	0.4666E-03	0.1073E-04	0.2350E-03	8 1 87 19	5
AVERAGE RESIDUES	--	0.91257E-05	0.63867E-04	0.88915E-04	0.43380E-06	0.23413E-04	4000
ISTP=	4000	IB =	1	IROW =	1	TIME =	39.0000

J= 1 Y= 0.2431 CL= 0.0061 CD= 0.1525 CM= 0.0143

OPILOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

O	X	X/CL	X/CU	CPL	CPU				
-0.0725	0.0000	0.0000	0.8489	-0.2046	*		I	+	
-0.0709	0.0093	0.0107	0.8647	-0.0679	*		I	+	
-0.0692	0.0198	0.0227	0.6310	-0.3670		*	I		+
-0.0672	0.0317	0.0363	0.6057	-0.2933		*	I		+
-0.0649	0.0450	0.0516	0.3560	-0.6828		*	I		+
-0.0624	0.0606	0.0682	0.3675	-0.4748		*	I		+
-0.0595	0.0781	0.0868	0.2950	-0.4555		*	I		+
-0.0563	0.0980	0.1079	0.2788	-0.3433		*	I		+
-0.0527	0.1203	0.1315	0.2444	-0.2627		*	I		+
-0.0487	0.1455	0.1581	0.2223	-0.1763		*	I	+	
-0.0441	0.1739	0.1881	0.1916	-0.1163		*	I	+	

J= 2 Y= 0.2642 CL= 0.0003 CD= 0.1527 CM= 0.0103

OPLOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

0	X	X/CL	X/CU	CPL	CPU				
-0.0784	0.0000	0.0000	0.8421	-0.2029	*		I	+	
-0.0768	0.0093	0.0107	0.8578	-0.0673	*		I	+	
-0.0750	0.0198	0.0227	0.6259	-0.3640		*	I	+	

● ● ● ● ● ●

*** Several lines deleted ***

• • • • •

0.0781	0.9784	0.9793	0.1554	0.1723		*	I
0.0799	0.9898	0.9903	0.1873	0.2202		++	I
0.0814	1.0000	1.0000	0.2283	0.2640		++	I

• • • • •

*** Several sets of pressure coefficient output deleted ***

• • • • •

J= 20 Y= 1.0000 CL= 0.2872 CD= 0.3748 CM= 0.0054

OPLOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

0	X	X/CL	X/CU	CPL	CPU			
	0.0765	0.0000	0.0000	0.3652	-1.0048	*	I	+
	0.0771	0.0088	0.0103	0.3599	-0.9427	*	I	+
	0.0777	0.0187	0.0218	0.3496	-0.9191	*	I	+

• • • • •

*** Several lines deleted ***

● ● ● ● ● ●

0.1350	0.9769	0.9785	0.1085	0.0170	*	+
0.1357	0.9892	0.9899	0.1114	0.0274	*	+
0.1363	1.0000	1.0000	0.1177	0.0346	*	+I

ISTP= 4000 IB = 2 IROW = 1 TIME = 39.0000

J= 1 Y= 0.2431 CL= 0.0061 CD= 0.1525 CM= 0.0143

OPILOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

O	X	X/CL	X/CU	CPL	CPU				
-0.0725	0.0000	0.0000	0.8488	-0.2046	*		I	+	
-0.0709	0.0093	0.0107	0.8647	-0.0679	*		I	+	
-0.0692	0.0198	0.0227	0.6310	-0.3669		*	I	+	

*** Several lines deleted ***

0.0812	0.9783	0.9795	0.1567	0.1739		*	I
0.0829	0.9898	0.9904	0.1890	0.2221		++	I
0.0845	1.0000	1.0000	0.2303	0.2664		++	I

*** Several sets of pressure coefficient output deleted ***

J= 20 Y= 1.0000 CL= 0.2871 CD= 0.3748 CM= 0.0054

OPILOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

O	X	X/CL	X/CU	CPL	CPU				
0.0765	0.0000	0.0000	0.3652	-1.0046	*	I		+	
0.0771	0.0088	0.0103	0.3599	-0.9426	*	I		+	
0.0777	0.0187	0.0218	0.3495	-0.9189	*	I		+	

*** Several lines deleted ***

0.1350	0.9769	0.9785	0.1085	0.0170		*	+
0.1357	0.9892	0.9899	0.1114	0.0274		*	+
0.1363	1.0000	1.0000	0.1177	0.0346		*	+I

*** Pressure coefficient output for blades 3,4,5,6 and 7 deleted ***

ISTP= 4000 IB = 8 IROW = 1 TIME = 39.0000

J= 1 Y= 0.2431 CL= 0.0061 CD= 0.1526 CM= 0.0143

OPILOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

O	X	X/CL	X/CU	CPL	CPU				
-0.0725	0.0000	0.0000	0.8489	-0.2048	*		I	+	
-0.0709	0.0093	0.0107	0.8648	-0.0681	*		I	+	
-0.0692	0.0198	0.0227	0.6311	-0.3671		*	I	+	

*** Several lines deleted ***

0.0812	0.9783	0.9795	0.1567	0.1738		*	I
0.0829	0.9898	0.9904	0.1889	0.2221		++	I
0.0845	1.0000	1.0000	0.2303	0.2663		++	I

.....

*** Several sets of pressure coefficient output deleted ***

.....

J= 20 Y= 1.0000 CL= 0.2872 CD= 0.3748 CM= 0.0054

OPLOT OF CP AT EQUAL INTERVALS IN THE MAPPED PLANE

0	X	X/CL	X/CU	CPL	CPU			
0.0765	0.0000	0.0000	0.3652	-1.0049	*	I		+
0.0771	0.0088	0.0103	0.3599	-0.9428	*	I		+
0.0777	0.0187	0.0218	0.3495	-0.9192	*	I		+

.....

*** Several lines deleted ***

.....

0.1350	0.9769	0.9785	0.1084	0.0169	*	+
0.1357	0.9892	0.9899	0.1113	0.0274	*	+
0.1363	1.0000	1.0000	0.1176	0.0345	*	+I

FOR THE SINGLE ROTATION PROPFAN :

ADVANCE RATIO = 3.55000000

POWER COEFFICIENT = 1.93005237

THRUST COEFFICIENT = 0.12844400

EFFICIENCY = 0.23625069

inlet mach no.=	0.477	u=	0.0000	v=	0.0001	w=	-0.4769	q1=	1.0159	p=	0.7303	r=	0.01000	j=	1
exit mach no.=	0.471	u=	0.0197	v=	0.0424	w=	-0.4691	q1=	1.0344	p=	0.7143	r=	0.15465	j=	1
inlet mach no.=	0.484	u=	-0.0022	v=	0.0007	w=	-0.4841	q1=	1.0159	p=	0.7303	r=	0.02469	j=	2
exit mach no.=	0.487	u=	0.0263	v=	0.0403	w=	-0.4845	q1=	1.0344	p=	0.7143	r=	0.16501	j=	2

.....

*** Several lines deleted ***

.....

inlet mach no.=	0.478	u=	0.0051	v=	-0.0023	w=	-0.4781	q1=	1.0231	p=	0.7371	r=	0.49923	j=	20
exit mach no.=	0.583	u=	0.0641	v=	0.0653	w=	-0.5760	q1=	0.9526	p=	0.7143	r=	0.49994	j=	20
inlet mach no.=	0.466	u=	-0.0122	v=	0.0026	w=	-0.4661	q1=	1.0231	p=	0.7371	r=	0.50200	j=	21
exit mach no.=	0.589	u=	0.0321	v=	0.0769	w=	-0.5827	q1=	0.9526	p=	0.7143	r=	0.50200	j=	21

Relative Mach No. at Tip =0.8810149119292667

Relative Mach No. at Tip (Mid Plane)=0.6552965378752234

rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999

rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999

rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999

rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999

rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999

rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999

rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999

rho=1.210292069705291E-7 rtip=0.5 a0=13040. t0=528. p0=14.699999999999999

The Following Quantities are at I =5 Z=1.102164637904551

Mass Flow Rate =-0.2362104564496086 (lb/s) Corrected =-0.2383186094130973 (lb/s @ 518.7R & 14.7psi)

The Following Quantities are at I =50 Z=-2.053126919559777E-2

Mass Flow Rate =-0.2182055156343727 (lb/s) Corrected =-0.2201529764341545 (lb/s @ 518.7R & 14.7psi)

The Following Quantities are at I =95 Z=-0.8030763509607972

Mass Flow Rate =-0.2353501830606399 (lb/s) Corrected =-0.2374506581764937 (lb/s @ 518.7R & 14.7psi)

TIME/ITERATION =4.918026410602522

UNIT 57 (output file; contains blade motion)

1	1	0.30000E-02	0.30153E-06	0.30153E-06	0.30153E-06
2	1	0.60000E-02	0.12041E-05	0.12041E-05	0.12041E-05
3	1	0.90000E-02	0.27047E-05	0.27047E-05	0.27047E-05
4	1	0.12000E-01	0.48002E-05	0.48002E-05	0.48002E-05
5	1	0.15000E-01	0.74876E-05	0.74876E-05	0.74876E-05
6	1	0.18000E-01	0.10764E-04	0.10764E-04	0.10764E-04
7	1	0.21000E-01	0.14626E-04	0.14626E-04	0.14626E-04
8	1	0.24000E-01	0.19071E-04	0.19071E-04	0.19071E-04
9	1	0.27000E-01	0.24095E-04	0.24095E-04	0.24095E-04
10	1	0.30000E-01	0.29696E-04	0.29696E-04	0.29696E-04

.....

*** 3980 lines of output deleted ***

.....

3991	1	0.11973E+02	0.00000E+00	0.00000E+00	0.00000E+00
3992	1	0.11976E+02	0.00000E+00	0.00000E+00	0.00000E+00
3993	1	0.11979E+02	0.00000E+00	0.00000E+00	0.00000E+00
3994	1	0.11982E+02	0.00000E+00	0.00000E+00	0.00000E+00
3995	1	0.11985E+02	0.00000E+00	0.00000E+00	0.00000E+00
3996	1	0.11988E+02	0.00000E+00	0.00000E+00	0.00000E+00
3997	1	0.11991E+02	0.00000E+00	0.00000E+00	0.00000E+00
3998	1	0.11994E+02	0.00000E+00	0.00000E+00	0.00000E+00
3999	1	0.11997E+02	0.00000E+00	0.00000E+00	0.00000E+00
4000	1	0.12000E+02	0.00000E+00	0.00000E+00	0.00000E+00

UNIT 93 (output file; contains generalized force for first mode)

-1, 1, 0., 6.747695897747867E-4, 0.
2*1, 2*6.747695897747867E-4, 0.
-1, 2, -4.704826972654562E-5, 6.747695884667497E-4, 0.
1, 2, 2*6.747695884667497E-4, 0.
-1, 3, -4.70482661490705E-5, 6.747695720200341E-4, 0.
1, 3, 2*6.747695720200341E-4, 0.
-1, 4, -4.704824711026373E-5, 6.747695740221063E-4, 0.
1, 4, 2*6.747695740221063E-4, 0.
-1, 5, -4.704824972809134E-5, 6.747695726110822E-4, 0.
1, 5, 2*6.747695726110822E-4, 0.
-1, 6, -4.704824847790735E-5, 6.747695875888651E-4, 0.
1, 6, 2*6.747695875888651E-4, 0.
-1, 7, -4.704826462793875E-5, 6.747695841430138E-4, 0.
1, 7, 2*6.747695841430138E-4, 0.
-1, 8, -4.704825686802126E-5, 6.747695667193472E-4, 0.
1, 8, 2*6.747695667193472E-4, 0.
2, 1, 6.747282514998412E-4, 6.747695897747867E-4, -4.133827494548492E-8
2*2, 6.747282304928117E-4, 6.747695884667497E-4, -4.135797393792217E-8
2, 3, 6.747282364286122E-4, 6.747695720200341E-4, -4.133559142194265E-8
2, 4, 6.747282471448283E-4, 6.747695740221063E-4, -4.132687727795292E-8
2, 5, 6.7472824505466E-4, 6.747695726110822E-4, -4.132755642219376E-8
2, 6, 6.747282377282011E-4, 6.747695875888651E-4, -4.13498606639806E-8
2, 7, 6.747282223794198E-4, 6.747695841430138E-4, -4.136176359401111E-8
2, 8, 6.747282384831979E-4, 6.747695667193472E-4, -4.13282361493017E-8

.....

*** 31960 lines of output deleted ***

.....

3999	1	6.760029673910997E-4	6.747695897747867E-4	1.233377616313008E-6
3999	2	6.759126944620996E-4	6.747695884667497E-4	1.143105995349974E-6
3999	3	6.758612167654248E-4	6.747695720200341E-4	1.091644745390696E-6
3999	4	6.757822192762184E-4	6.747695740221063E-4	1.012645254112182E-6
3999	5	6.758859973166678E-4	6.747695726110822E-4	1.116424705585594E-6

```

3999, 6, 6.759295732602851E-4, 6.747695875888651E-4, 1.15998567142006E-6
3999, 7, 6.760323035187483E-4, 6.747695841430138E-4, 1.262719375734466E-6
3999, 8, 6.760232588532456E-4, 6.747695667193472E-4, 1.253692133898476E-6
4000, 1, 6.75961416203033E-4, 6.747695897747867E-4, 1.191826428246362E-6
4000, 2, 6.758710554035131E-4, 6.747695884667497E-4, 1.10146693676344E-6
4000, 3, 6.758195210225699E-4, 6.747695720200341E-4, 1.049949002535771E-6
4000, 4, 6.757408008077683E-4, 6.747695740221063E-4, 9.712267856620826E-7
4000, 5, 6.758449075186419E-4, 6.747695726110822E-4, 1.075334907559705E-6
4000, 6, 6.758883097063746E-4, 6.747695875888651E-4, 1.11872211750949E-6
4000, 7, 6.759910521359144E-4, 6.747695841430138E-4, 1.221467992900543E-6
4000, 8, 6.759816715907855E-4, 6.747695667193472E-4, 1.212104871438357E-6

```

UNIT 94 (output file; contains generalized force for second mode)

```

-1, 1, 0., -1.96979467734535E-4, 0.
2*1, 2*-1.96979467734535E-4, 0.
-1, 2, -4.704826972654562E-5, -1.969794624252603E-4, 0.
1, 2, 2*-1.969794624252603E-4, 0.
-1, 3, -4.70482661490705E-5, -1.969794605043533E-4, 0.
1, 3, 2*-1.969794605043533E-4, 0.
-1, 4, -4.704824711026373E-5, -1.969794630599045E-4, 0.
1, 4, 2*-1.969794630599045E-4, 0.
-1, 5, -4.704824972809134E-5, -1.969794625347551E-4, 0.
1, 5, 2*-1.969794625347551E-4, 0.
-1, 6, -4.704824847790735E-5, -1.969794630058948E-4, 0.
1, 6, 2*-1.969794630058948E-4, 0.
-1, 7, -4.704826462793875E-5, -1.969794566549689E-4, 0.
1, 7, 2*-1.969794566549689E-4, 0.
-1, 8, -4.704825686802126E-5, -1.969794587753197E-4, 0.
1, 8, 2*-1.969794587753197E-4, 0.
2, 1, -1.969596152188923E-4, -1.96979467734535E-4, 1.985251564268902E-8
2*2, -1.969596054476876E-4, -1.969794624252603E-4, 1.985697757264648E-8
2, 3, -1.969596104058821E-4, -1.969794605043533E-4, 1.985009847119134E-8
2, 4, -1.969596172652424E-4, -1.969794630599045E-4, 1.984579466214608E-8
2, 5, -1.969596164254636E-4, -1.969794625347551E-4, 1.984610929154501E-8
2, 6, -1.969596095876199E-4, -1.969794630058948E-4, 1.985341827482473E-8
2, 7, -1.969596013466322E-4, -1.969794566549689E-4, 1.985530833671644E-8
2, 8, -1.969596133778736E-4, -1.969794587753197E-4, 1.984539744603192E-8

```

.....

*** 31960 lines of output deleted ***

.....

```

3999, 1, -1.979258329276693E-4, -1.96979467734535E-4, -9.463651931343464E-7
3999, 2, -1.978711815557726E-4, -1.969794624252603E-4, -8.917191305123431E-7
3999, 3, -1.978384393089656E-4, -1.969794605043533E-4, -8.589788046122967E-7
3999, 4, -1.977841728757799E-4, -1.969794630599045E-4, -8.047098158754303E-7
3999, 5, -1.978426189167201E-4, -1.969794625347551E-4, -8.631563819649218E-7
3999, 6, -1.978904684605108E-4, -1.969794630058948E-4, -9.110054546160664E-7
3999, 7, -1.979471391059684E-4, -1.969794566549689E-4, -9.67682450999513E-7
3999, 8, -1.979480014865581E-4, -1.969794587753197E-4, -9.685427112384251E-7
4000, 1, -1.979065643264756E-4, -1.96979467734535E-4, -9.270965919405682E-7
4000, 2, -1.978518313866511E-4, -1.969794624252603E-4, -8.723689613908056E-7
4000, 3, -1.978190028960186E-4, -1.969794605043533E-4, -8.395423916653099E-7
4000, 4, -1.97764918448029E-4, -1.969794630599045E-4, -7.854553881244535E-7
4000, 5, -1.978237297361532E-4, -1.969794625347551E-4, -8.442672013980051E-7
4000, 6, -1.978714991423668E-4, -1.969794630058948E-4, -8.9203613647202E-7
4000, 7, -1.979281220624478E-4, -1.969794566549689E-4, -9.486654074788644E-7
4000, 8, -1.979287759423346E-4, -1.969794587753197E-4, -9.493171670149624E-7

```


UNIT 95 (output file; contains generalized force for third mode)

```
-1, 1, 0., -4.704826972654562E-5, 0.
2*1, 2*-4.704826972654562E-5, 0.
-1, 2, -4.704826972654562E-5, -4.70482661490705E-5, 0.
1, 2, 2*-4.70482661490705E-5, 0.
-1, 3, -4.70482661490705E-5, -4.704824711026373E-5, 0.
1, 3, 2*-4.704824711026373E-5, 0.
-1, 4, -4.704824711026373E-5, -4.704824972809134E-5, 0.
1, 4, 2*-4.704824972809134E-5, 0.
-1, 5, -4.704824972809134E-5, -4.704824847790735E-5, 0.
1, 5, 2*-4.704824847790735E-5, 0.
-1, 6, -4.704824847790735E-5, -4.704826462793875E-5, 0.
1, 6, 2*-4.704826462793875E-5, 0.
-1, 7, -4.704826462793875E-5, -4.704825686802126E-5, 0.
1, 7, 2*-4.704825686802126E-5, 0.
-1, 8, -4.704825686802126E-5, -4.704823992645961E-5, 0.
1, 8, 2*-4.704823992645961E-5, 0.
2, 1, -4.703329748282324E-5, -4.704826972654562E-5, 1.49722437223828E-8
2*2, -4.703327415563128E-5, -4.70482661490705E-5, 1.499199343921869E-8
2, 3, -4.703327981844156E-5, -4.704824711026373E-5, 1.49672918221648E-8
2, 4, -4.703329186058228E-5, -4.704824972809134E-5, 1.495786750905538E-8
2, 5, -4.703328996616515E-5, -4.704824847790735E-5, 1.495851174220311E-8
2, 6, -4.703328145632475E-5, -4.704826462793875E-5, 1.498317161400392E-8
2, 7, -4.703326471514708E-5, -4.704825686802126E-5, 1.499215287418392E-8
2, 8, -4.703328314224113E-5, -4.704823992645961E-5, 1.495678421848008E-8
```

.....

*** 31960 lines of output deleted ***

.....

```
3999, 1, -4.697105640595698E-5, -4.704826972654562E-5, 7.721332058864376E-8
3999, 2, -4.698504657571099E-5, -4.70482661490705E-5, 6.321957335951068E-8
3999, 3, -4.697916042725324E-5, -4.704824711026373E-5, 6.908668301048963E-8
3999, 4, -4.698474133355999E-5, -4.704824972809134E-5, 6.350839453135061E-8
3999, 5, -4.697706219721951E-5, -4.704824847790735E-5, 7.118628068784882E-8
3999, 6, -4.69767019270692E-5, -4.704826462793875E-5, 7.156270086954887E-8
3999, 7, -4.696679056661007E-5, -4.704825686802126E-5, 8.146630141119513E-8
3999, 8, -4.698036249715063E-5, -4.704823992645961E-5, 6.787742930897643E-8
4000, 1, -4.695440064373074E-5, -4.704826972654562E-5, 9.386908281488332E-8
4000, 2, -4.696842389269491E-5, -4.70482661490705E-5, 7.984225637558926E-8
4000, 3, -4.69624200268076E-5, -4.704824711026373E-5, 8.582708345612234E-8
4000, 4, -4.696797976531659E-5, -4.704824972809134E-5, 8.026996277474968E-8
4000, 5, -4.696030717885393E-5, -4.704824847790735E-5, 8.794129905342028E-8
4000, 6, -4.695996671911042E-5, -4.704826462793875E-5, 8.82979088283331E-8
4000, 7, -4.695012534186538E-5, -4.704825686802126E-5, 9.813152615587711E-8
4000, 8, -4.696371787679719E-5, -4.704823992645961E-5, 8.452204966241834E-8
```

UNIT 98 (output file; contains performance characteristics)

ITERATION	CP	CT	EFF
1,	1.92620107182389,	0.1275021397257223,	0.2349871997515409
2,	1.926111588730315,	0.1274754125002433,	0.2349488560391126
3,	1.926199250335721,	0.1275015279820106,	0.2349862945161298
4,	1.926109766011905,	0.1274747973716321,	0.2349479446367626
5,	1.926197369160022,	0.1275008962400435,	0.2349853597035789
6,	1.926107853554726,	0.127474156381191,	0.2349469965132291
7,	1.926195370100935,	0.1275002332730777,	0.2349843817222492
8,	1.926105796700782,	0.1274734789529495,	0.2349459988429032
9,	1.926193198863771,	0.1274995285154654,	0.2349833477228014
10,	1.926103541851482,	0.127472754618001,	0.2349449388680886

.....

*** 3980 lines of output deleted ***

.....

```
3991, 1.930131606146716, 0.1284681031454307, 0.2362853210184728
3992, 1.930045152200613, 0.1284420225080583, 0.2362479340878192
3993, 1.930133423167177, 0.1284685951117135, 0.2362860034298695
3994, 1.930046963517654, 0.1284425145041928, 0.2362486173180187
3995, 1.930135237948512, 0.1284690894313831, 0.2362866904425571
3996, 1.930048771818726, 0.1284430086701267, 0.2362493049070871
3997, 1.930137049317793, 0.1284695857774061, 0.2362873815986219
3998, 1.930050575936747, 0.128443504679205, 0.2362499963970475
3999, 1.930138856106126, 0.128470083821691, 0.2362880764377113
4000, 1.930052374708843, 0.1284440022038851, 0.2362506913277826
```

7. RUN STREAM ON CRAY YMP

```
# QSUB-r tm6243
# QSUB-lm 8.0Mw
# QSUB-eo
#
cd /wrk/smsriv/ducte3d/tm6243
/bin/rm *
cat > ducte3d.f << EOF
C      PROGRAM MAIN(INPUT,OUTPUT,TAPE5=INPUT,TAPE6=OUTPUT,
.....
***  FORTRAN program goes here  ***
.....
END
EOF
cat > ducte3d.inp << EOF
SR3D Only one direction marching (from root to tip)
.....
***  Input file goes here  ***
.....
EOF
cft77 -V -exs -a static ducte3d.f
segldr -V -o ducte3d ducte3d.o
ln ../std621/fort.31 ./fort.11
#n ../tm6242/fort.31 ./fort.11
#n ../tm6242/fort.32 ./fort.12
#n ../tm6242/fort.33 ./fort.13
#n ../tm6242/fort.34 ./fort.14
#n ../tm6242/fort.35 ./fort.15
#n ../tm6242/fort.36 ./fort.16
#n ../tm6242/fort.37 ./fort.17
#n ../tm6242/fort.38 ./fort.18
#n grid.den fort.2
ln $HOME/sr3grd.nas fort.3
ln $HOME/sr3mod.nas fort.4
rm *.l
time ducte3d < ducte3d.inp > ducte3d.out
#v fort.7 grid.dat
```

```
#v fort.9 flow.dat
rm fort.1* fort.2* fort.6* fort.8* fort.7*
rm fort.90 fort.91 fort.92 fort.93 *.1 ducte3d
```

8. REFERENCES

1. Srivastava, R., "An Efficient Hybrid Scheme for the Solution of Rotational Flow Around Advanced Propellers", Ph.D. Thesis, Georgia Institute of Technology, 1990.
2. Srivastava, R., Sankar, L. N., Reddy, T. S. R., and Huff, D. L., Application of an Efficient Hybrid Scheme for Aeroelastic Analysis of Advanced Propellers, *Journal of Propulsion and Power*, Vol. 7, No. 5, pp. 767-775, 1991.
3. Srivastava, R., Reddy, T. S. R. and O. Mehmed, "Flutter Analysis of Propfans Using a Three Dimensional Euler Solver", AIAA Paper 94-1549, to appear in *Journal of Propulsion and Power*.
4. Srivastava, R., and Reddy, T. S. R., "Aeroelastic Analysis of Ducted Rotors", Presented at the ASME International Symposium on CFD in Turbomachinery, San Francisco, Nov. 1995.
5. Srivastava, R. and Reddy, T. S. R., "PROP3D: A Program for 3D Euler Unsteady Aerodynamic and Aeroelastic (Flutter and Forced Response) Analysis of Propellers - version 1," NASA CR-198471, April 1996.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE April 1997	3. REPORT TYPE AND DATES COVERED Final Contractor Report		
4. TITLE AND SUBTITLE User's Manual for DuctE3D: A Program for 3D Euler Unsteady Aerodynamic and Aeroelastic Analysis of Ducted Fans		5. FUNDING NUMBERS WU-538-06-13 G-NAG3-1230		
6. AUTHOR(S) R. Srivastava and T.S.R. Reddy				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) University of Toledo Department of Mechanical Engineering Toledo, Ohio 43606		8. PERFORMING ORGANIZATION REPORT NUMBER E-10707		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Lewis Research Center Cleveland, Ohio 44135-3191		10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA CR-202335		
11. SUPPLEMENTARY NOTES Project Manager, D.C. Janetzke, Structures and Acoustics Division, NASA Lewis Research Center, (216) 433-6041.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Categories 02 and 07 This publication is available from the NASA Center for AeroSpace Information, (301) 621-0390.		12b. DISTRIBUTION CODE		
13. ABSTRACT (Maximum 200 words) The program DuctE3D is used for steady or unsteady aerodynamic and aeroelastic analysis of ducted fans. This guide describes the input data required and the output files generated, in using DuctE3D. The analysis solves three dimensional unsteady, compressible Euler equations to obtain the aerodynamic forces. A normal mode structural analysis is used to obtain the aeroelastic equations, which are solved using either the time domain or the frequency domain solution method. Sample input and output files are included in this guide for steady aerodynamic analysis and aeroelastic analysis of an isolated fan row.				
14. SUBJECT TERMS Ducted fans; Aeroelastic analysis; Unsteady aerodynamics; Euler equations; Time domain			15. NUMBER OF PAGES 51	
			16. PRICE CODE A04	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	